


## "FPF13K" SERIES FAN FILTERS

Description: **Fan Filter 115/230 Va.c.**




<b>Type of material:</b>	ABS/PC alloy
<b>Standard color:</b>	RAL 7032, RAL 7035 and RAL 9005 - other colors on request
<b>Protection degree:</b>	IP54, according to EN 60529 Std Type 12, according to UL 508 Std
<b>Fixing system:</b>	by elastic hooks, otherwise by four 4.8 mm self-threading screws
<b>Plate thickness:</b>	from 1.5 mm to 2.2 mm
<b>Storage temperature:</b>	from -40°C to +70°C
<b>Motor Lifetime L10 at 40°C:</b>	45,000 h
<b>Motor protection:</b>	impedance
<b>Electrical connection:</b>	by terminal block 3 poles L-N-PE, 2.5 mm <sup>2</sup> (12 AWG)
<b>Earth connection:</b>	by PE pole
<b>Appliance class:</b>	Class I
<b>Type of filter media:</b>	thermo-linked progressive structure synthetic fibre
<b>Filtering class:</b>	class G3, according to EN 779
<b>Degree of separation:</b>	85% - DIN 24185
<b>Dust retention capacity:</b>	600 g/m <sup>2</sup>
<b>Note:</b>	filter media is washable for about 10 times
<b>Weight:</b>	1.1 Kg
<b>Approvals:</b>	CE, UL E237844


### technical drawing

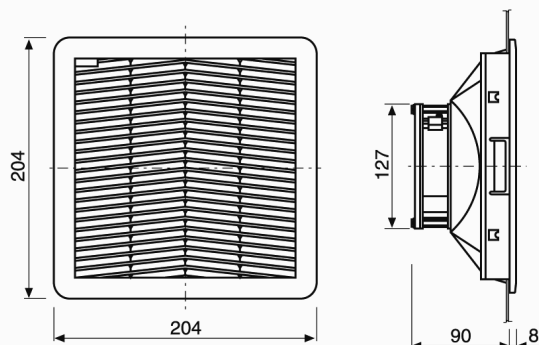

### mounting cut-out



IP 54

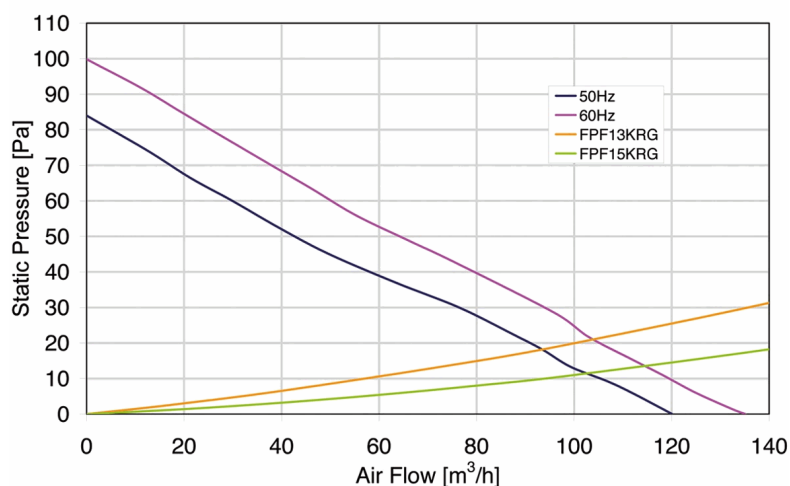

Model	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Fan Noise	Rated Temp. Range	Approvals
	(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[dB(A)]	(°C)	
FPF13K*115BE-110	115 V a.c.	50/60	0.200/0.160	14/12	120/135	84/100	46.0/50.0	-10 ÷ +50	CE; cURus
FPF13K*115BER-110	115 V a.c.	50/60	0.200/0.160	14/12	120/135	84/100	46.0/50.0	-10 ÷ +50	CE; cURus
FPF13K*230BE-110	230 V a.c.	50/60	0.100/0.090	23/21	120/135	84/100	46.0/50.0	-10 ÷ +50	CE; cURus
FPF13K*230BER-110	230 V a.c.	50/60	0.100/0.090	23/21	120/135	84/100	46.0/50.0	-10 ÷ +50	CE; cURus

\* U = RAL 7035 R = RAL 7032 N = RAL 9005 \*\*data with uncertainty of 15%