

FPF15KPRD24BR-110

standard with fan



FPF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. These units have a flat external profile and a quick snap-on fastening system with elastic hooks. Available in different range of sizes, airflow ratings and configurations.

Technical data		
APPROVALS		
Approvals	CE; cURus	
PERFORMANCE		
Max Airflow	145	m³/h
	85	CFM
Max Static Pressure	76	Pa
	0.31	in H2O
ELECTRICAL DATA		
Rated Voltage	24	V d.c.
Rated Current	0.4	A
Rated Power	9.6	W
Operating Voltage	10-26.7	V d.c.
Motor Protection	Electronically Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1.5-2.2	mm
	0.06-0.09	in
GENERIC DATA		
RAL Number	7032	
Airflow Direction	Reverse	
Electrical Connection	Terminal Block	
Life Expectancy	50000	h at 25 °C
	50000	h at 77 °F

FPF15KPRD24BR-110

standard with fan


Technical data		
Wires Section	18-12	AWG
Wires Section	1-2.5	mm²
Fan Noise	42.5	dB(A)
Filter Class	ISO coarse 55%	ISO 16890
Filter Class	G3	EN 779
Filter Material	thermo-linked progressive structure synthetic fibre	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP54	
Operating Temperature	-10÷50	°C
	14÷122	°F
Storage Temperature	-40÷70	°C
	-40÷158	°F
UL DATA		
UL File Number Recognized Component	E237844	
UL Environmental Type Rating	Type 12	
UL Ambient Temperature	50	°C
	122	°F

fan filters


FPF15KPRD24BR-110

standard with fan

Technical drawing mm (in)

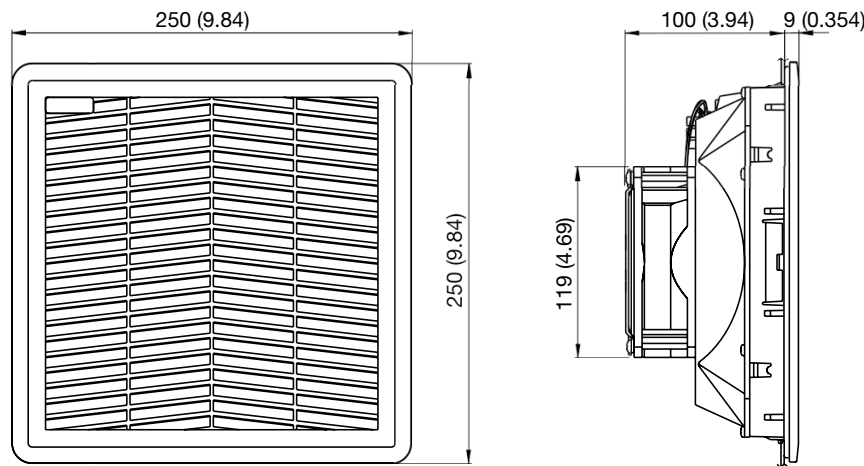

Mounting cut-out mm (in)

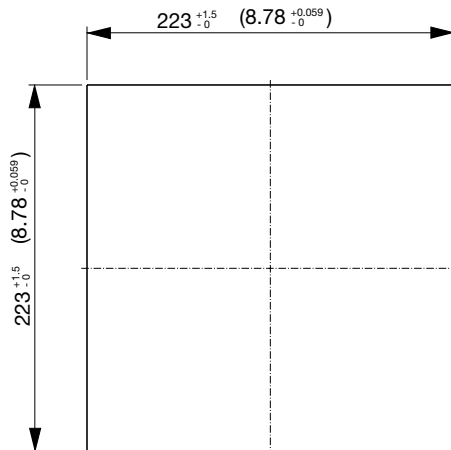

FPF15KPRD24BR-110

standard with fan

Air performance

