

FF15MA230UFR

standard with fan



FF series exhaust filter and filter fans represents a side-mounted cooling solution with filtered ambient air to maintain optimum ventilation inside the electrical cabinets. Screwless connection, fast tool-free mounting system with clip and maintenance friendliness are the main benefits. Available in a wide range of configurations for both indoor and outdoor use.

Technical data		
APPROVALS		
Approvals	CE	
PERFORMANCE		
Max Airflow	138/154	m³/h
	81/91	CFM
Airflow with Exhaust Filter	109/124	m³/h
	64/73	CFM
Max Static Pressure	80/55	Pa
	0.32/0.22	in H2O
ELECTRICAL DATA		
Rated Voltage	230	V a.c.
Rated Current	0.14/0.13	A
Rated Power	21/20	W
Operating Voltage	207-253	V a.c.
Frequency	50/60	Hz
Appliance Class	I	
Motor Protection	Impedance Protected	
MECHANICAL DATA		
Mounting Wall Thickness	1.3-3.7	mm
	0.05-0.15	in
GENERIC DATA		
Spare Parts Filter Media	M15FPF-EU3	

FF15MA230UFR


standard with fan

Technical data		
Casing Material	PC/ABS UL94 V-0	
RAL Number	7035	
Airflow Direction	Reverse	
Electrical Connection	Screwless Terminal Block	
Life Expectancy	80000	h at 25 °C
	80000	h at 77 °F
Wires Section	20-14	AWG
Wires Section	0.75-2.5	mm²
Fan Noise	46/50	dB(A)
Filter Class	ISO coarse 55%	ISO 16890
Filter Class	G3	EN 779
Filter Material	thermo-linked progressive structure synthetic fibre	
ENVIRONMENTAL AND THERMAL DATA		
IP Protection Degree	IP54	
Operating Temperature	-30÷60	°C
	-22÷140	°F
Storage Temperature	-40÷70	°C
	-40÷158	°F


FF15MA230UFR

standard with fan

Technical drawing mm (in)

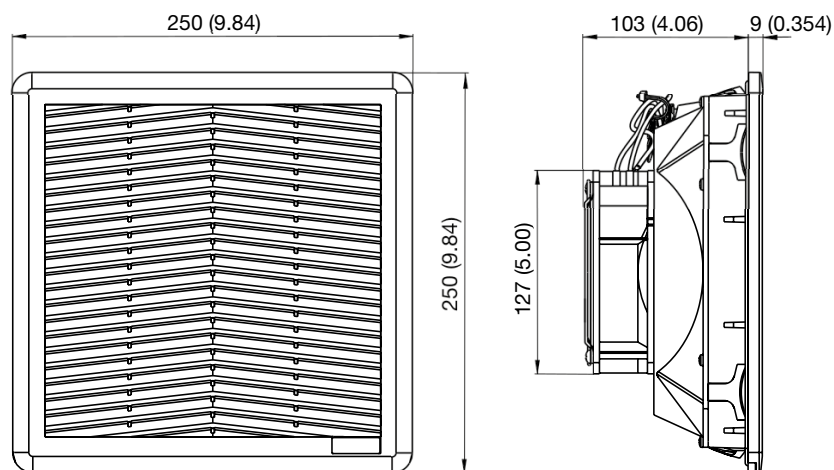

Mounting cut-out mm (in)

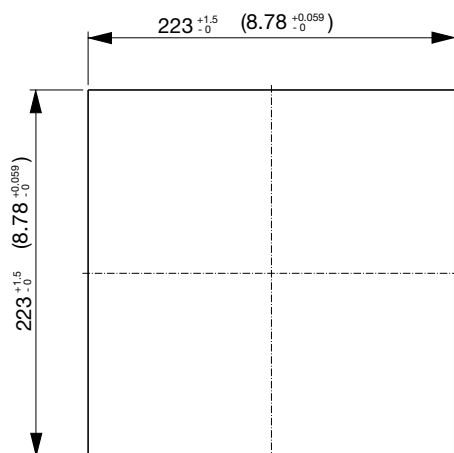

FF15MA230UFR

standard with fan

Air performance

