



HEC1238\_A SERIES

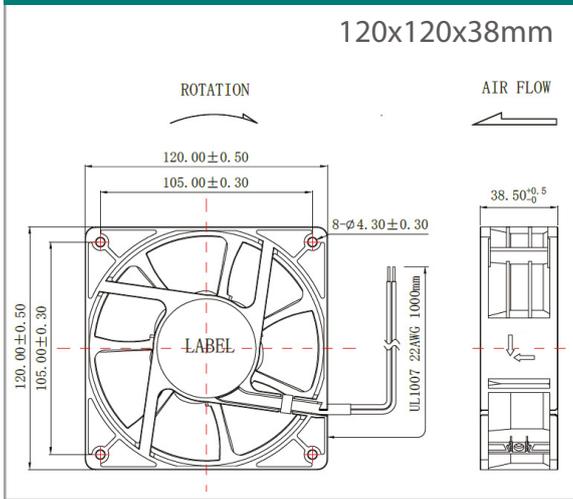

- Casing Material:** Thermoplastic UL 94V-0/Black
- Impeller Material:** Thermoplastic UL 94V-0/Black
- Motor Protection:** Locked Rotor Protected
- Rotation:** Clockwise (from label side)
- Storage Temperature:** -40°C to +70°C
- Operating Temperature:** -30°C to +70°C
- Lifetime (L10 at 40°C):** 70,000hrs
- Electrical Connection:** 2x Lead Wires
- Bearings:** 2x Ball Bearings
- Safety Approvals:** CE, ATEX

II 3G Ex ec IIC Gc

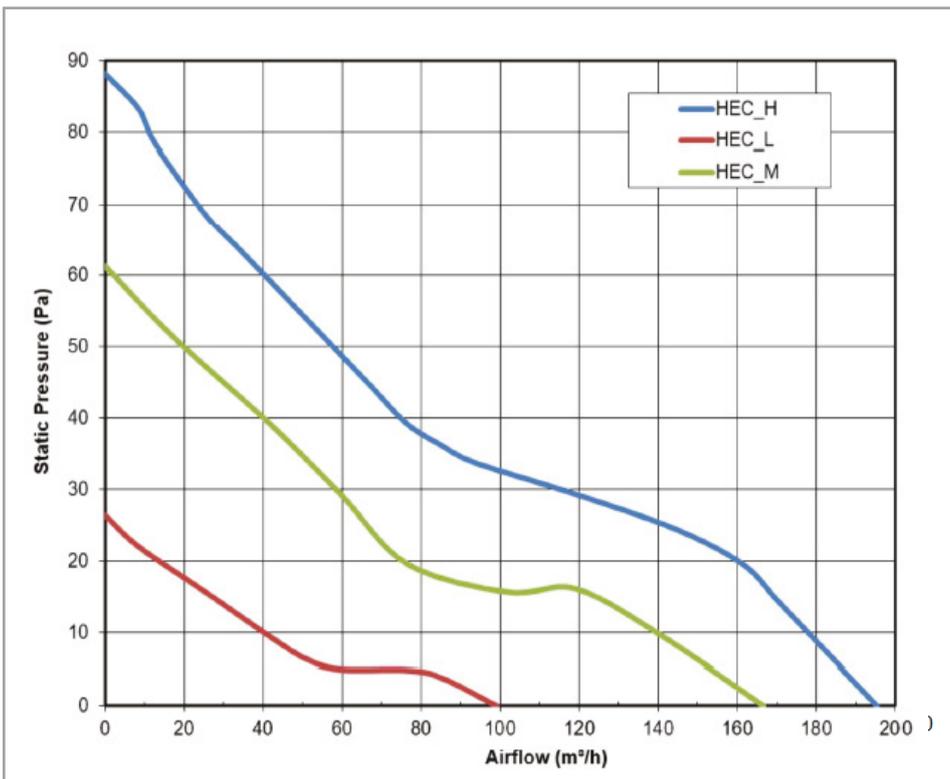

INGRESS PROTECTION 68



ATEX CERTIFICATED



ELECTRONICALLY COMMUTATED

Model	Voltage (V)	Voltage Range (V)	Speed (rpm)	Rated Current (A)	Rated Power (Wa)	Max. Air Flow (m³/h)	Max Pressure (Pa)	Noise (dB(A))
HEC1238HA	115/230	85-265	3000	0.16	5.8	196	88	45
HEC1238MA	115/230	85-265	2600	0.1	4.5	166	61	39
HEC1238LA	115/230	85-265	1700	0.06	2	99	26	25