
frame fans





Casing material:Thermoplastic in black color, UL 94 V-0Impeller materialThermoplastic in black color, UL 94 V-0Protection degree:IP20, according to EN 60529 standard

Fixing system: by No 4 M4 screws


Motor protection: Impedance


Storage temperature: From -40°C to +80°C
Rated temperature range: From -10°C to +70°C

Lifetime L10 at 25°C: 50,000 h

Electrical connection: 2 leads 24 AWG UL1430

Approvals: CE Weight: 0.270 kg

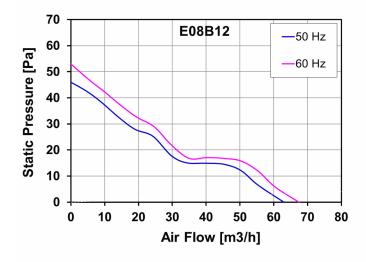







Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
E08B12HWBL00	Ball	115 V a.c.	50/60	0.06/0.06	5.0/5.0	64/68	46/53	35/37	2,800/3,000	CE
E08B23HWBL00	Ball	230 V a.c.	50/60	0.05/0.05	5.0/5.0	68/73	53/61	37/39	3,000/3,200	CE