



"D06A04HWSA00" COSTECH FAN

Description: **d.c. axial fan 60x60x25 mm**

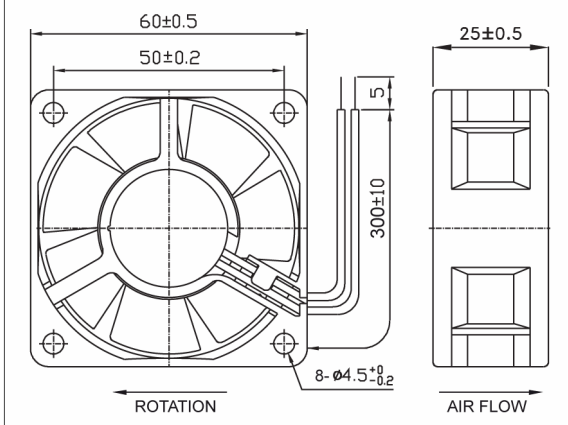

Casing material:	Black fibreglass reinforced plastic (PBT) UL 94V-0
Impeller material:	Black fibreglass reinforced plastic (PBT) UL 94V-0
Protection degree:	IP20, according to EN 60529 standard
Fixing system:	by 2x 4 holes Ø4,5mm
Storage temperature:	from -40°C to +70°C
Operating temperature:	from -10°C to +70°C
Lifetime L10 at 40°C:	40,000 h
Electrical connection:	2 leads 24AWG UL 1007, 300 mm long
Weight:	62g
Motor protection:	by IC
Polarity protection	no

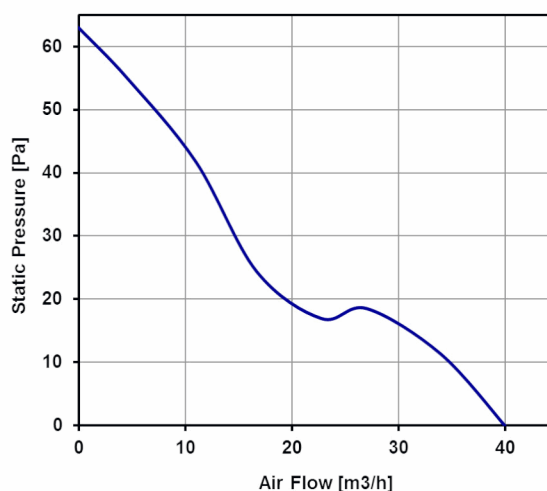

Model	Bearing	Voltage	Rated Current	Rated Power	Max Air Flow	Static Pressure	Noise	RPM	Approvals
		(V)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
D06A04HWSA00	Hypro	12 V d.c.	0.230	2.76	40	63	33.1	4,500	CE; cURus

data with uncertainty of 10%