



"A06GF" SERIES COSTECH FANS

Description: **a.c. axial fan 60x60x30 mm**

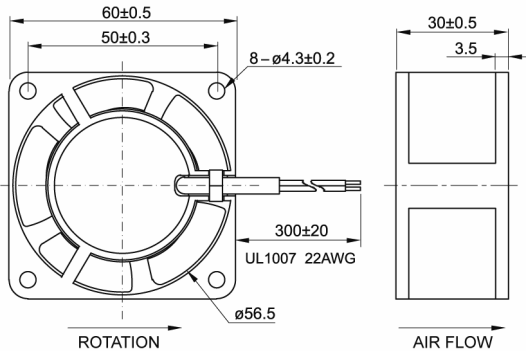

Casing material:	Black varnished aluminum
Impeller material	Black fibreglass reinforced plastic (PBT PC) UL 94V-0
Protection degree:	IP20, according to EN 60529 standard
Fixing system:	by No 4 M4 screws
Motor protection:	Impedance
Storage temperature:	from -40°C to +80°C
Rated temperature range:	from -40°C to +70°C
Lifetime L10 at 40°C:	40,000 h
Electrical connection:	2 leads 22AWG UL 1007, 300 mm long.
Weight:	0.14 kg
Approvals:	UL E223195

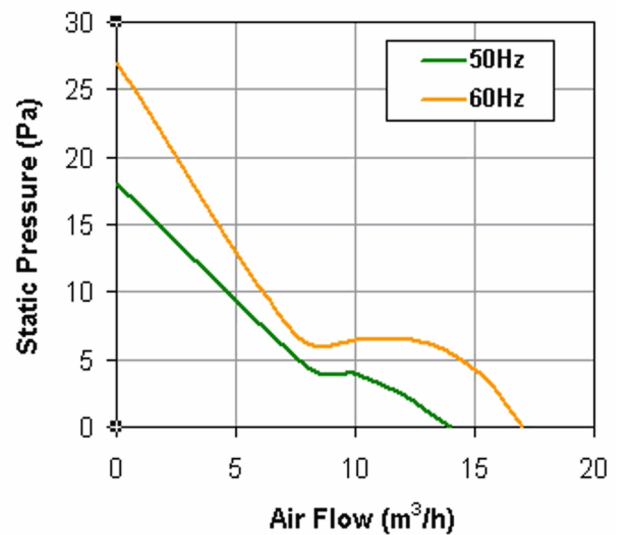

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
A06G12HWBF00	Ball	115 V a.c.	50/60	0.042/0.035	5.0/4.0	14/17	18/27	27.0/28.0	2,200/2,800	CE; cURus
A06G23HWBF00	Ball	230 V a.c.	50/60	0.025/0.021	5.0/4.0	14/17	17/27	27.0/28.0	2,400/3,000	CE; cURus