


"A08BF" SERIES COSTECH FANS

Description: **Axial fan a.c. 80x80x38mm**

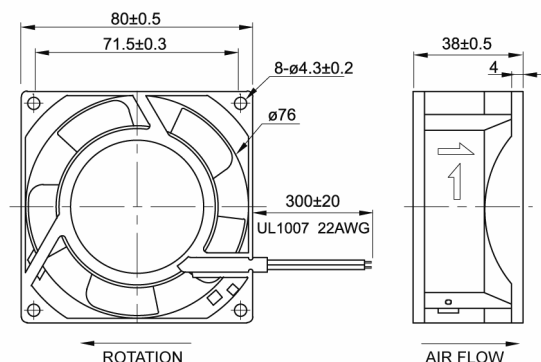

Casing material:

Black varnished aluminum

Impeller material

Black fibreglass reinforced plastic (PBT PC)
UL 94V-0

Protection degree:

IP20, according to EN 60529 standard

Fixing system:

by No 4 M4 screws

Motor protection:

Impedance

Storage temperature:

from -40°C to +80°C

Rated temperature range:

from -40°C to +70°C

Lifetime L10 at 40°C:

over 40,000 h

Electrical connection:



2 leads 22AWG UL 1007, 300 mm long.

Approvals:

UL E223195

Weight:

0.28 kg

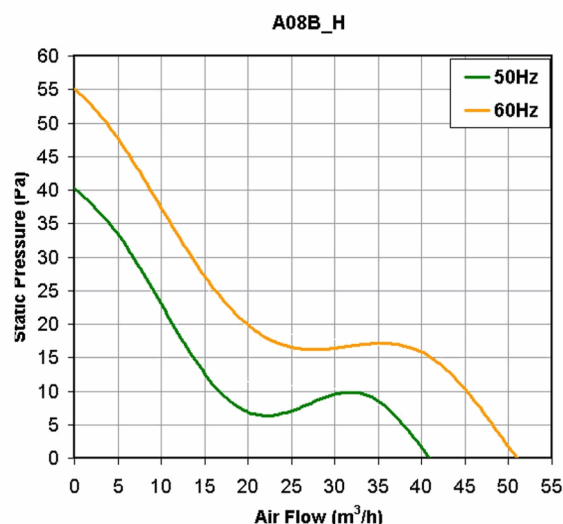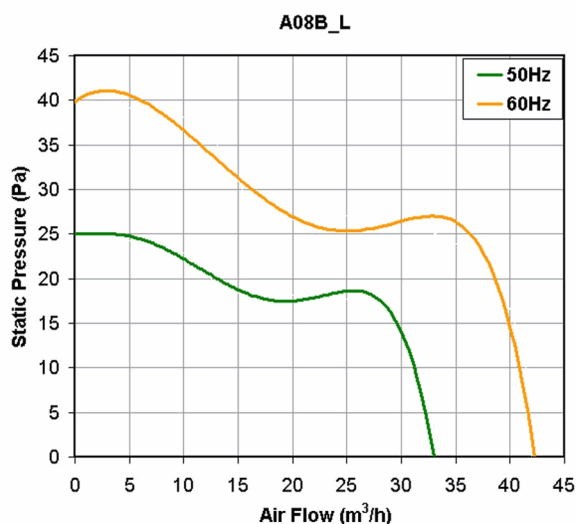

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m³/h)	(Pa)	[db(A)]	(rpm)	
A08B12HWBF00	Ball	115 V a.c.	50/60	0.140/0.120	14/12	41/51	40/55	32.0/36.0	2,500/3,000	CE; cURus
A08B12HWSF00	Sleeve	115 V a.c.	50/60	0.140/0.120	14/12	41/51	40/55	32.0/36.0	2,500/3,000	CE; cURus
A08B12LWBF00	Ball	115 V a.c.	50/60	0.120/0.100	12/9.0	33/42	25/40	28.0/32.0	1,900/2,400	CE; cURus
A08B12LWSF00	Sleeve	115 V a.c.	50/60	0.120/0.100	12/9.0	33/42	25/40	28.0/32.0	1,900/2,400	CE; cURus
A08B23HWBF00	Ball	230 V a.c.	50/60	0.070/0.060	14/12	41/51	40/55	32.0/36.0	2,500/3,000	CE; UR
A08B23HWSF00	Sleeve	230 V a.c.	50/60	0.070/0.060	14/12	41/51	40/55	32.0/36.0	2,500/3,000	CE; UR
A08B23LWBF00	Ball	230 V a.c.	50/60	0.060/0.050	14/12	33/42	25/40	28.0/32.0	1,900/2,400	CE; UR
A08B23LWSF00	Sleeve	230 V a.c.	50/60	0.060/0.050	14/12	33/42	25/40	28.0/32.0	1,900/2,400	CE; UR