

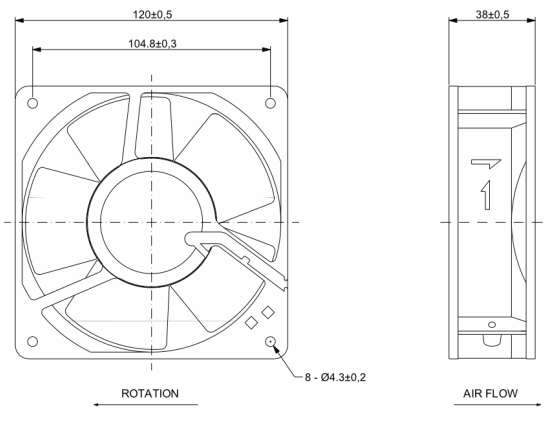


A12BMT SERIES

Description: **Axial fan a.c. 120x120x38mm**

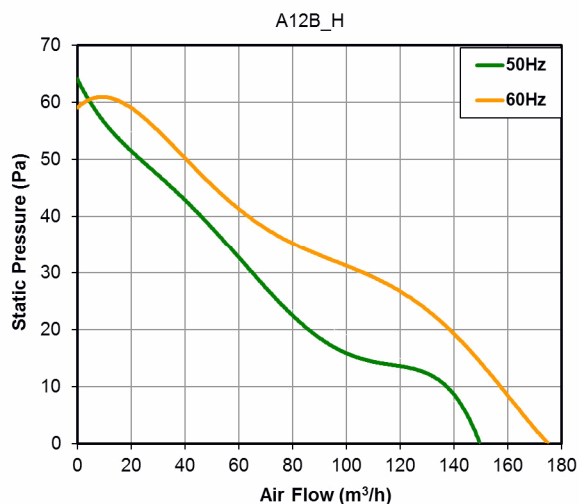

Casing material:	Black warchised aluminum
Impeller material	Metal
Protection degree:	IP20, according to EN 60529 standard
Fixing system:	by No 2 M4 screws
Insulation class:	F
Motor protection:	thermal
Storage temperature:	from -40°C to +90°C
Rated temperature range:	from -40°C to +90°C
Lifetime L10 at 40°C:	40,000 h
Electrical connection:	N°2 male faston 2.8x0.8
Approvals:	UL E223195
Weight:	0.55 kg

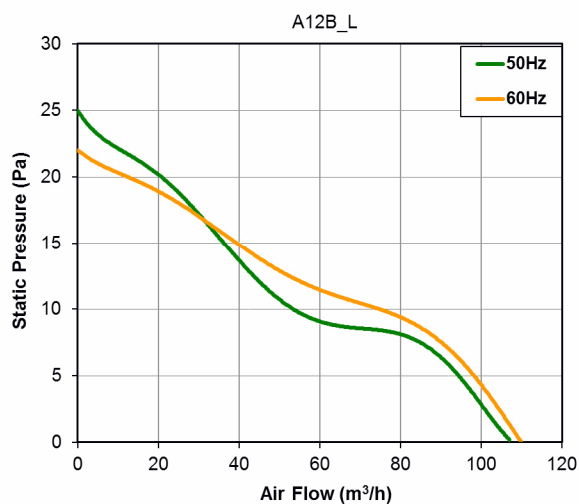

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
A12B12HTBMT0	Ball	115 V a.c.	50/60	0.100/0.090	17/15	150/175	64/59	42.0/46.0	2,700/3,100	CE
A12B12LTBMT0	Ball	115 V a.c.	50/60	0.060/0.050	17/15	110/115	25/22	33.0/35.0	2,000/2,050	CE
A12B23HTBMT0	Ball	230 V a.c.	50/60	0.100/0.090	17/15	150/175	64/59	42.0/46.0	2,700/3,100	CE; cURus
A12B23LTBMT0	Ball	230 V a.c.	50/60	0.060/0.050	17/15	110/115	25/22	33.0/35.0	2,000/2,050	CE; cURus