


"A17CF" SERIES COSTECH FANS

Description: **Axial fan a.c. 172X150x51mm**

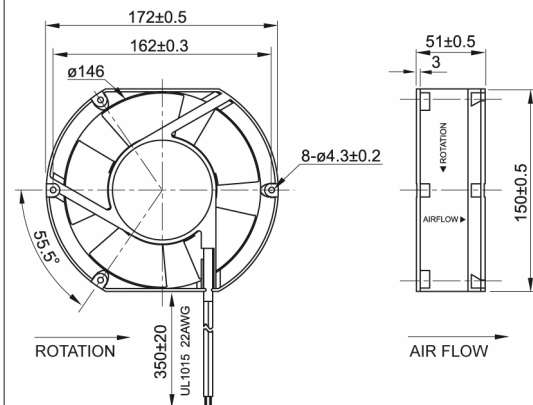

Casing material:

Impeller material

Protection degree:

Fixing system:

Motor protection:

Storage temperature:

Rated temperature range:

Lifetime L10 at 40°C:

Electrical connection:

Approvals:

Weight:

Black varnished aluminum UL 94V-0

Black fibreglass reinforced plastic (PBT PC)
UL 94V-0

IP20, according to EN 60529 standard

by No 4 M4 screws

Impedance Protected

from -40°C to +80°C


from -40°C to +60°C

40,000 h

2 leads 22AWG UL 1015, 350 mm long

UL E223195

0,9 kg

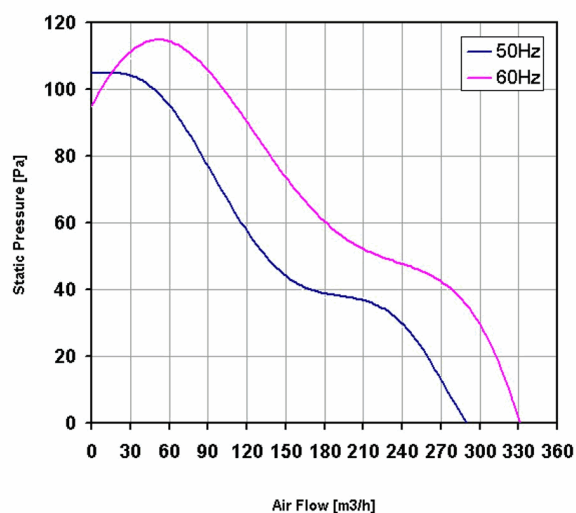

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
A17C12HWBF00	Ball	115 V a.c.	50/60	0.430/0.360	32/28	290/331	105/95	50.0/55.0	2,750/3,100	CE; cURus;
A17C23HWBF00	Ball	230 V a.c.	50/60	0.230/0.180	35/30	290/331	105/95	50.0/55.0	2,750/3,100	CE; cURus;