



# "A17CF" SERIES COSTECH FANS

Description: **Axial fan a.c. 172X150x51mm**

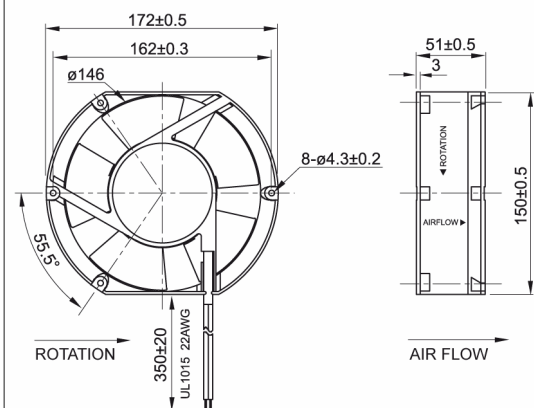

<b>Casing material:</b>	Black varnished aluminum UL 94V-0
<b>Impeller material</b>	Black fibreglass reinforced plastic (PBT PC) UL 94V-0
<b>Protection degree:</b>	IP20, according to EN 60529 standard
<b>Fixing system:</b>	by No 4 M4 screws
<b>Motor protection:</b>	Impedance Protected
<b>Storage temperature:</b>	from -40°C to +80°C
<b>Rated temperature range:</b>	from -40°C to +60°C
<b>Lifetime L10 at 40°C:</b>	40,000 h
<b>Electrical connection:</b>	2 leads 22AWG UL 1015, 350 mm long
<b>Approvals:</b>	UL E223195
<b>Weight:</b>	0,9 kg

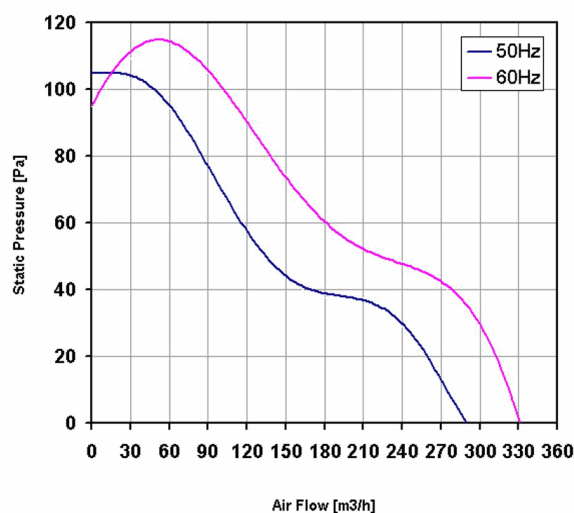

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
A17C12HWBF00	Ball	115 V a.c.	50/60	0.430/0.360	32/28	290/331	105/95	50.0/55.0	2,750/3,100	CE; cURus;
A17C23HWBF00	Ball	230 V a.c.	50/60	0.230/0.180	35/30	290/331	105/95	50.0/55.0	2,750/3,100	CE; cURus;