



**"A17MMT" SERIES COSTECH FANS**

Description: **Axial fan a.c. 172X150x55mm**

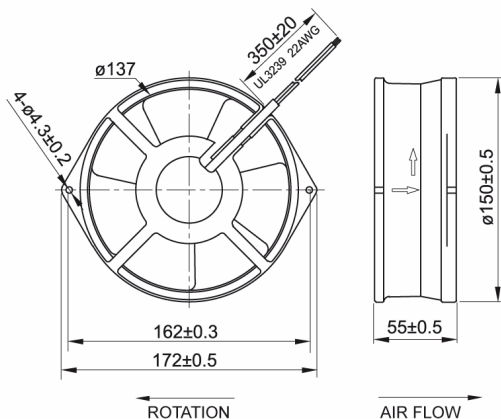

<b>Casing material:</b>	Black varnished aluminum
<b>Impeller material</b>	Metal
<b>Protection degree:</b>	IP44, according to EN 60529 standard
<b>Fixing system:</b>	by No 2 M4 screws
<b>Insulation class:</b>	F
<b>Motor protection:</b>	thermal
<b>Storage temperature:</b>	from -40°C to +90°C
<b>Rated temperature range:</b>	from -40°C to +90°C
<b>Lifetime L10 at 40°C:</b>	40,000 h
<b>Electrical connection:</b>	2 leads 22AWG UL 3239, 350 mm long
<b>Approvals:</b>	UL E223195
<b>Weight:</b>	1.1 kg

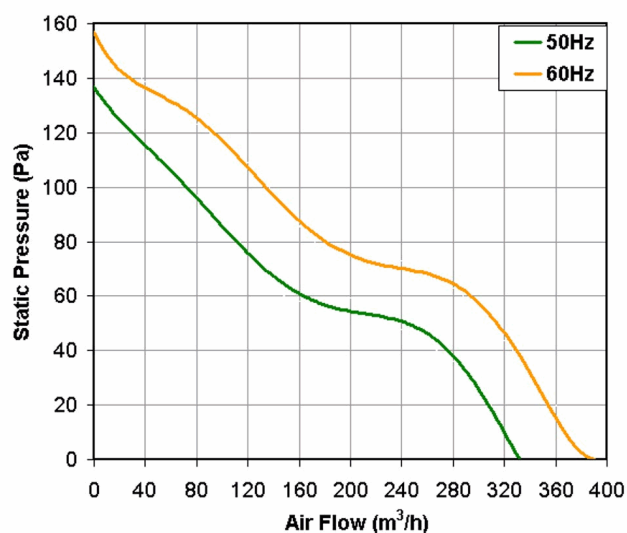

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m³/h)	(Pa)	[db(A)]	(rpm)	
A17M12SWBMT0	Ball	115 V a.c.	50/60	0.52/0.470	42/42	332/391	137/157	49.0/53.0	2,800/3,250	CE; cURus
A17M23SWBMT0	Ball	230 V a.c.	50/60	0.250/0.230	42/42	332/391	137/157	49.0/53.0	2,800/3,250	CE; cURus