


## C17BF SERIES

Description: **Axial fan a.c. 172X150x38mm**

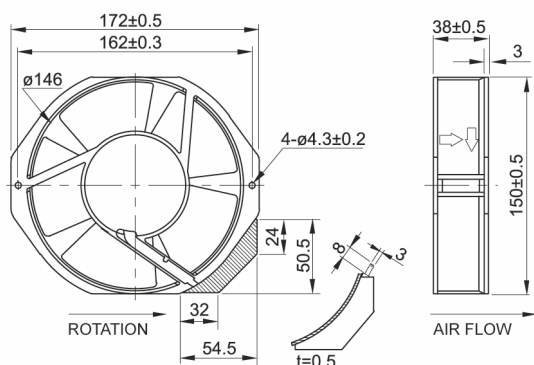

**Casing material:**  
**Impeller material**

Black varnished aluminum  
Black fibreglass reinforced plastic (PBT PC)  
UL 94V-0

**Protection degree:**

IP20, according to EN 60529 standard

**Fixing system:**

by No 4 M4 screws

**Motor protection:**

thermal

**Storage temperature:**

from -40°C to +80°C

**Rated temperature range:**

from -40°C to +70°C

**Lifetime L10 at 40°C:**

40,000 h

**Electrical connection:**


flat terminals 110 series (2.8x0.5 mm)

**Approvals:**

UL E223195

**Weight:**

0,72 kg

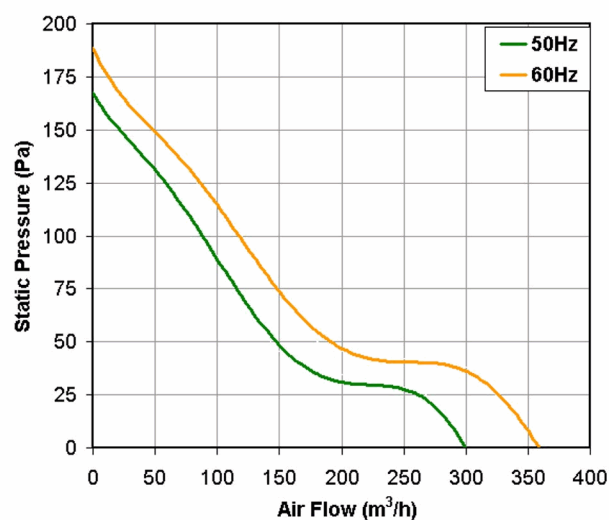

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m³/h)	(Pa)	[db(A)]	(rpm)	
C17B12HTBF00	Ball	115 V a.c.	50/60	0.250/0.230	29/28	300/360	167/187	54.0/58.0	2,850/3,400	CE; cURus
C17B23HTBF00	Ball	230 V a.c.	50/60	0.110/0.110	27/26	300/360	167/187	54.0/58.0	2,850/3,400	CE; cURus