


C17CF SERIES

Description: **Axial fan a.c. 172X150x51mm**

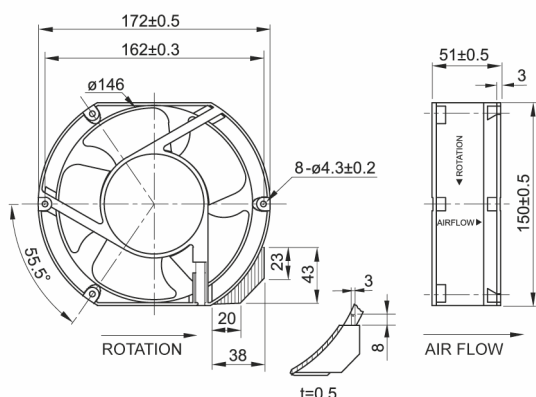

Casing material:
Impeller material

Black warchised aluminum
Black fibreglass reinforced plastic (PBT PC)
UL 94V-0

Protection degree:

IP20, according to EN 60529 standard

Fixing system:

by No 4 M4 screws

Motor protection:

thermal

Storage temperature:

from -40°C to +80°C

Rated temperature range:

from -40°C to +70°C

Lifetime L10 at 40°C:

40,000 h

Electrical connection:


flat terminals 110 series (2.8x0.5 mm)

Approvals:

UL E223195

Weight:

0.8 kg

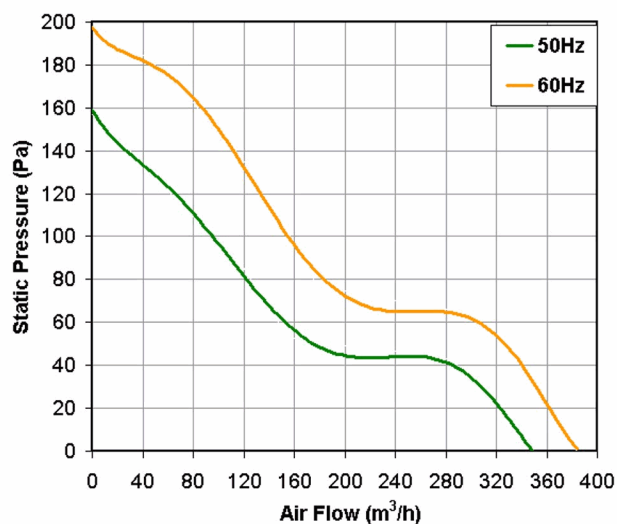

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m³/h)	(Pa)	[db(A)]	(rpm)	
C17C12HTBF00	Ball	115 V a.c.	50/60	0.260/0.250	31/31	348/384	157/197	53.0/58.0	2,850/3,400	CE; cURus
C17C23HTBF00	Ball	230 V a.c.	50/60	0.120/0.120	29/29	348/384	157/197	53.0/58.0	2,850/3,400	CE; cURus