


C17CF SERIES

Description: **Axial fan a.c. 172X150x51mm**

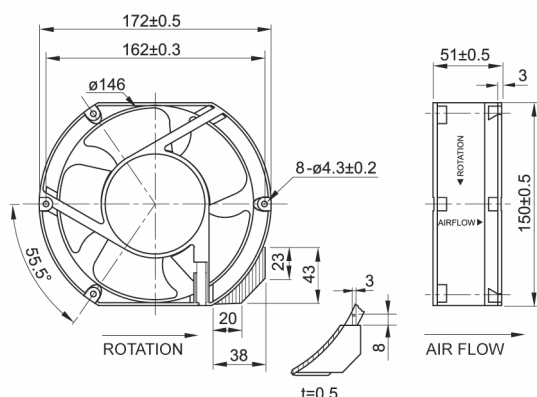

Casing material:

Impeller material

Protection degree:

Fixing system:

Motor protection:

Storage temperature:

Rated temperature range:

Lifetime L10 at 40°C:

Electrical connection:

Approvals:

Weight:

Black warchised aluminum

Black fibreglass reinforced plastic (PBT PC)
UL 94V-0

IP20, according to EN 60529 standard

by No 4 M4 screws

thermal

from -40°C to +80°C


from -40°C to +70°C

40,000 h

flat terminals 110 series (2.8x0.5 mm)

UL E223195

0.8 kg

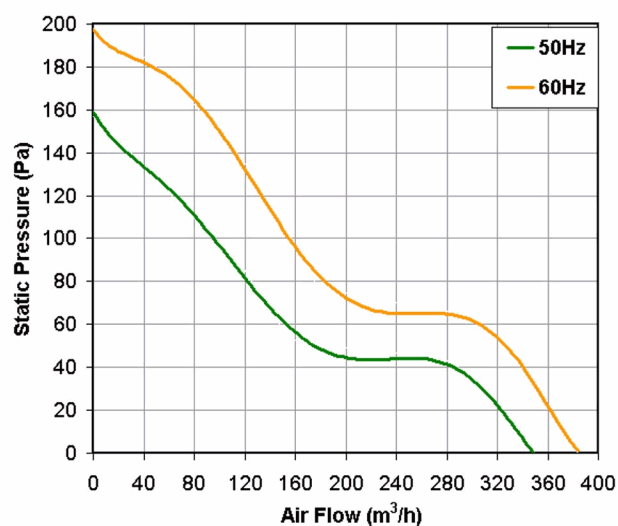

| Model | Bearing | Voltage | Frequency | Rated Current | Rated Power | Max Air Flow** | Static Pressure | Noise | RPM | Approvals |
|--------------|---------|------------|-----------|---------------|-------------|----------------|-----------------|-----------|-------------|-----------|
| | | (V) | (Hz) | (A) | (W) | (m³/h) | (Pa) | [db(A)] | (rpm) | |
| C17C12HTBF00 | Ball | 115 V a.c. | 50/60 | 0.260/0.250 | 31/31 | 348/384 | 157/197 | 53.0/58.0 | 2,850/3,400 | CE; cURus |
| C17C23HTBF00 | Ball | 230 V a.c. | 50/60 | 0.120/0.120 | 29/29 | 348/384 | 157/197 | 53.0/58.0 | 2,850/3,400 | CE; cURus |