
frame fans



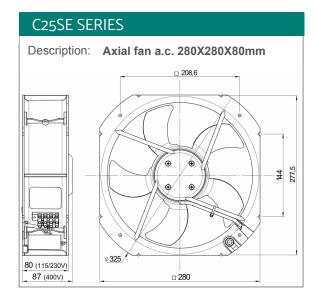

Fan material: casing of aluminium alloy die casting and

black painted steel aluminium UNI5076 No 4 holes Ø5.4

Motor protection: thermally

Rated temperature range: from -20 $^{\circ}$ C to +70 $^{\circ}$ C Motor Lifetime L10 at 25 $^{\circ}$ C da 53,000 a 80,000 h


(approx.):

Casing material:

Fixing system:

Electrical connection: by terminal block 3 pins (L-N-PE)

Weight: 2,800 kg

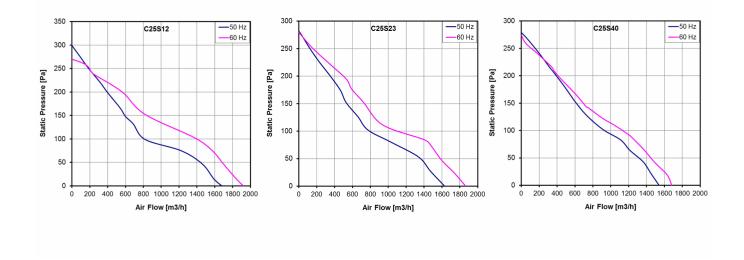

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
C25S12HKBE00	Ball	115 V a.c.	50/60	1.1/0.6	107/138	1,680/1,920	299/270	64.6/67.4	2,730/3,170	CE
C25S23HKBE00	Ball	230 V a.c.	50/60	0.50/0.28	101/127	1,630/1,865	280/280	67.0/70.0	2,735/3,150	CE
C25S40HKBE00	Ball	400 V 3 ~	50/60	0.19/0.21	86/117	1,540/1,680	280/275	67.0/69.0	2,635/2,840	CE

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.