

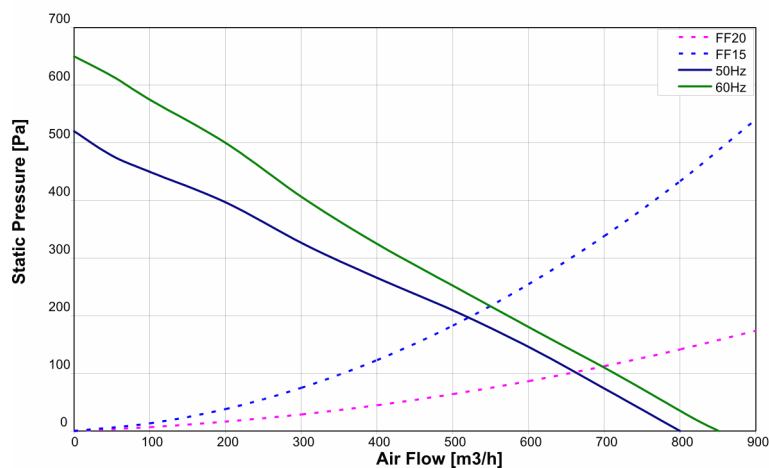


## "T22" SERIES

Description: **Roof Exhaust Unit**

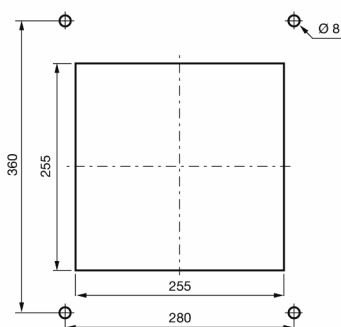

<b>Type of material:</b>	epoxy painted steel casing
<b>Standard colour:</b>	RAL 7032 and RAL 7035
<b>Protection degree:</b>	IP23, according to EN 60529 standard
<b>Fixing method:</b>	By No 4 M6 screws
<b>Plate thickness:</b>	every
<b>Storage temperature:</b>	from -20°C to +70°C
<b>Lifetime L10 at 40°C:</b>	50,000 h
<b>Motor protection:</b>	thermal
<b>Electrical connection:</b>	by 3 core 1.0 mm <sup>2</sup> cable (blue, brown, and y/g)
<b>Earth connection:</b>	by yellow/green conductor
<b>Appliance class:</b>	class I
<b>Weight:</b>	6.27 Kg

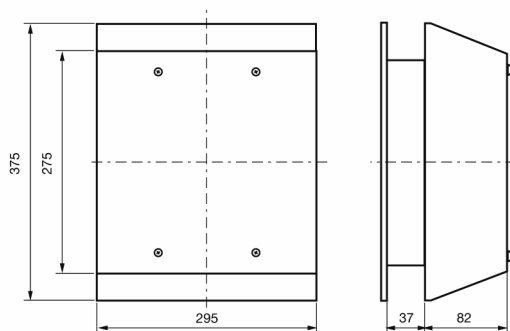

Model	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Fan Noise	Rated Temp. Range	Approvals
	(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(°C)	
T22U115B	115 V a.c.	50/60	1.10/1.50	130/170	800/850	520/650	74.0/75.6	-20 ÷ +60	CE
T22U230B	230 V a.c.	50/60	0.56/0.70	125/161	800/850	520/650	75.2/76.7	-20 ÷ +60	CE

(\*) data with uncertainty of 10%