

CCU10A231WNIUX

indoor

> CONTACT US



The CCU series wall-mounted cooling units represent an ideal solution for cooling electrical panels in high external temperatures, isolating them from the surrounding environment. The range of cooling units meets different indoor and outdoor application needs, ensuring high technical and safety standards. In all models, the polyurethane gasket is laid by machine, significantly reducing installation times.

Technical data		
<b>APPROVALS</b>		
Approvals	CE; UKCA	
<b>PERFORMANCE</b>		
Cooling Capacity L35L35	1015/1115	W
	3463/3805	BTU/hr
Cooling Capacity L35L50	815/855	W
	2781/2917	BTU/hr
<b>ELECTRICAL DATA</b>		
Rated Voltage	230	V a.c.
Rated Current	4.2/4.6	A
Rated Power L35L35	485/565	W
Rated Power L35L50	535/645	W
Frequency	50/60	Hz
Max Current	20	A
Fuse T	8	A
<b>GENERIC DATA</b>		
Casing Material	Painted Steel	
RAL Number	7035	
Electrical Connection	Connector	
Refrigerant Number	R134a	
Refrigerant Charge	520	
Maximum Allowable Pressure	HP 2.4/LP 0.6	MPa

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU10A231WNIUX

indoor

> CONTACT US

CLIMATE CONTROL SYSTEMS

Technical data		
ENVIRONMENTAL AND THERMAL DATA		
Protection Degree Internal Circuit	IP54	
Operating Temperature	20÷50	°C
	68÷122	°F

Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

CCU10A231WNIUX

indoor

> CONTACT US


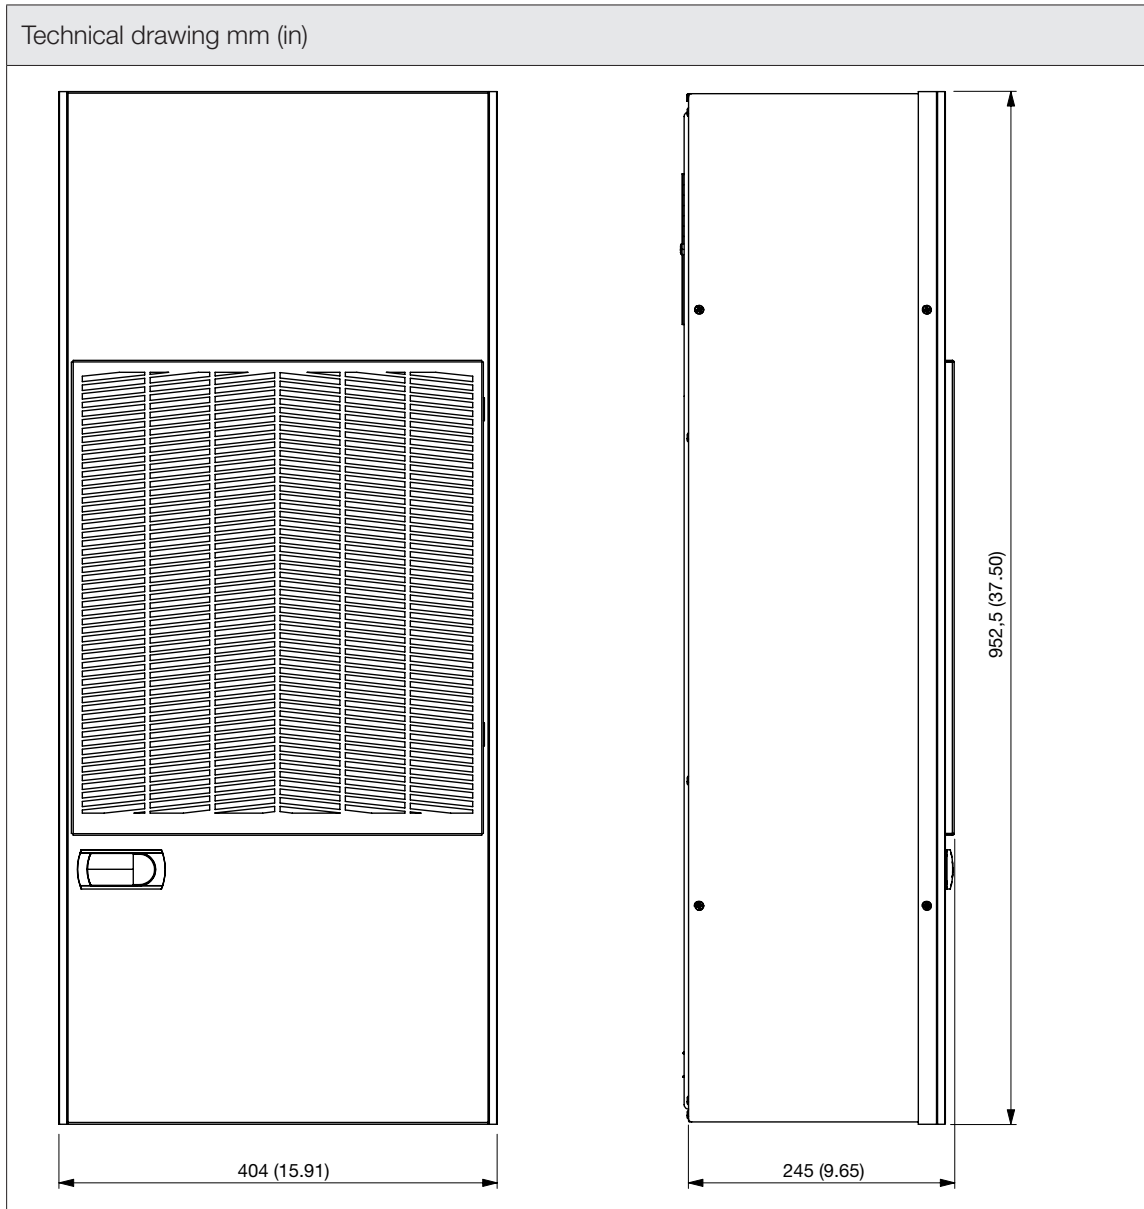


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.

Cooling Capacity vs Temperature

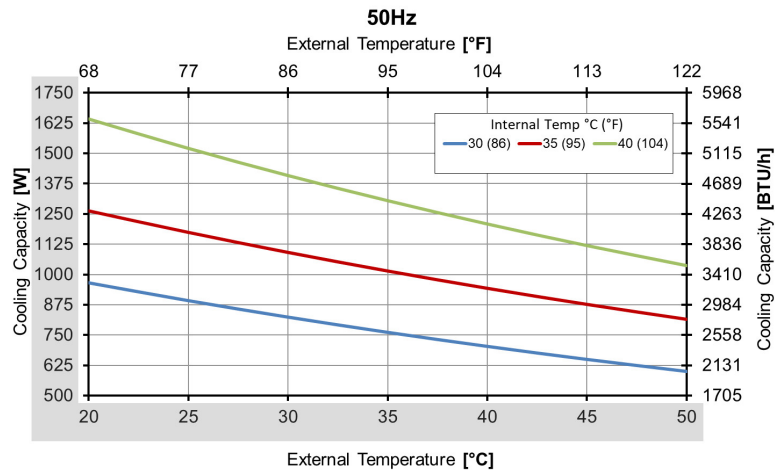

Cooling Capacity vs Temperature

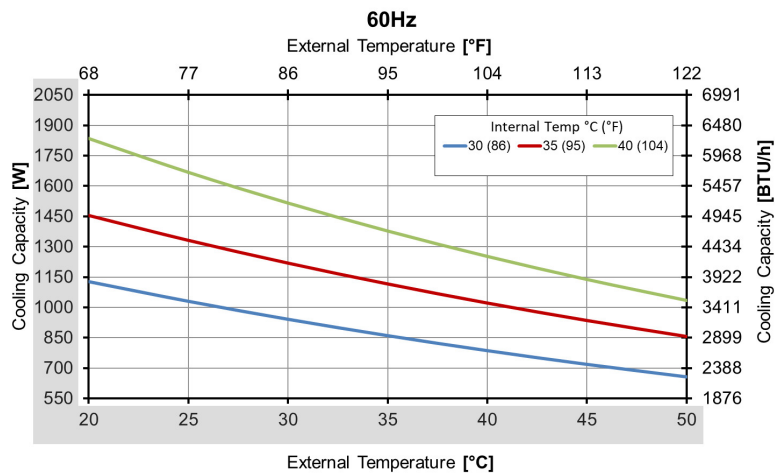


Image is for illustrative purpose only. All specifications, data and drawing are subject to change without notice. Please refer to our terms of sales including our warranty and limited liabilities clauses.