




Type: **GKHM 560-CII.183.6NA IE Gen3+**
Module
Part no.: N88-56700



Curve:

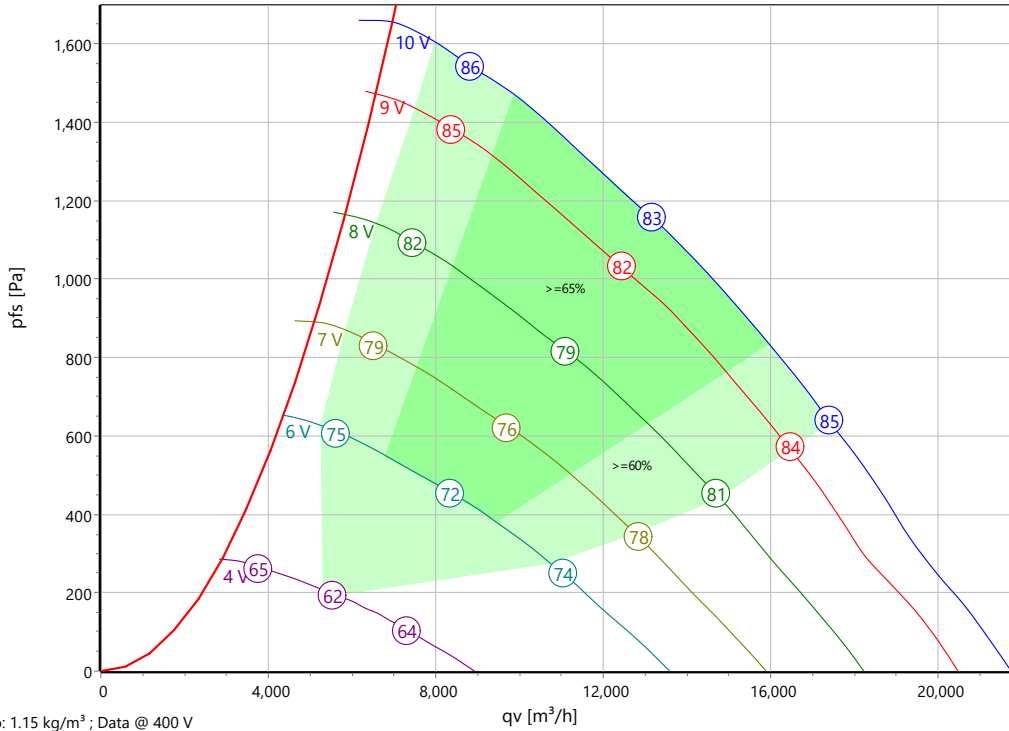

$p: 1.15 \text{ kg/m}^3$; Data @ 400 V

ErP-Data:

(EU Nr. 327/2011 (Lot11))		
q_v	13598	m³/h
p_{fs}	1113	Pa
η_{fs}	70.1	%
P_{ed}	6.31	kW
n	1920	r/min
N	72	N
v	10.492	m/s

Nominal Data:

U [V]	f [Hz]	Data @ [V]	P_{ed} [kW]	I_N [A]	n_N [r/min]	t_R [°C]	k_{10} [m²/s/h]	Eff.-Rating	IP	m [kg]
3~380-480	50/60	400	6.4	9.8	1920	-25 .. +40	283	IE 4	IP 54	64
		460		8.6						



Sound Data:

Frequency	Σ	63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	4 m
LwA(A,in) [dB(A)]		-38	-12	-9	-10	-6	-6	-9	-11	LpA(A,in) [dB(A)]	-7	-17
LwA(A,out) [dB(A)]	6	-36	-13	-10	-8	-6	-6	-9	-12	LpA(A,out) [dB(A)]	-1	-11

Attention: Start-up times up to ~ 20 - 60 sec. depending on motor-impeller combination, motor load and number of operation.
Please note during project planning (e.g. for condenser units in refrigeration circuits)!



Type: **GKHM 560-CII.183.6NA IE Gen3+**
Module
Part no.: N88-56700

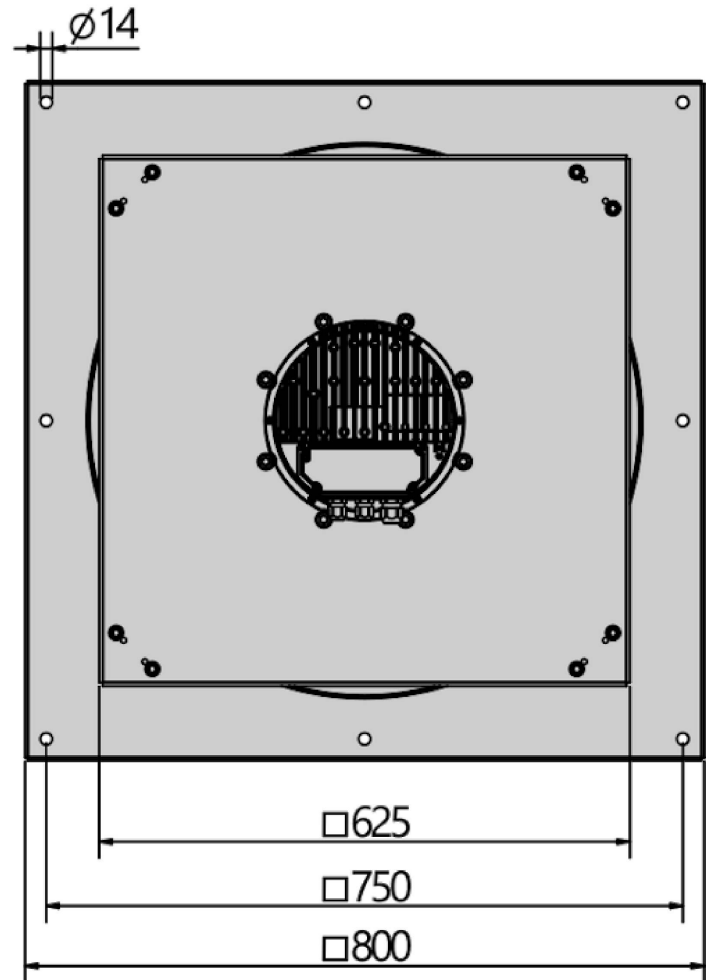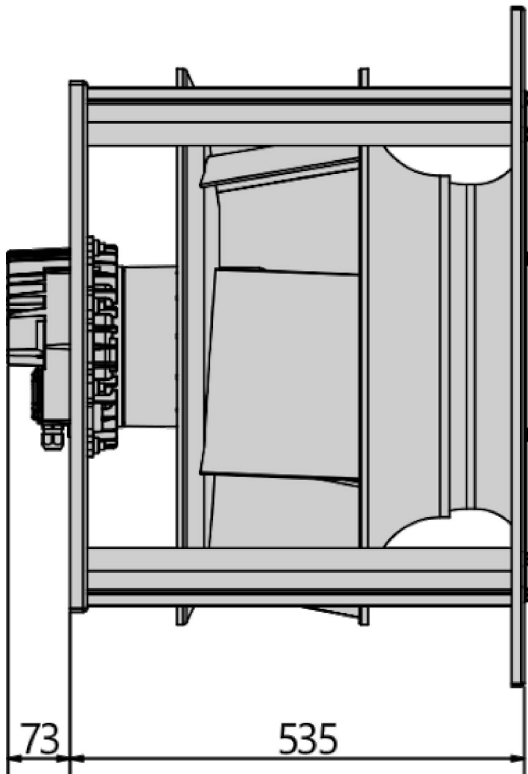




Type: **GKHM 560-CII.183.6NA IE Gen3+**

Module

Part no.: N88-56700

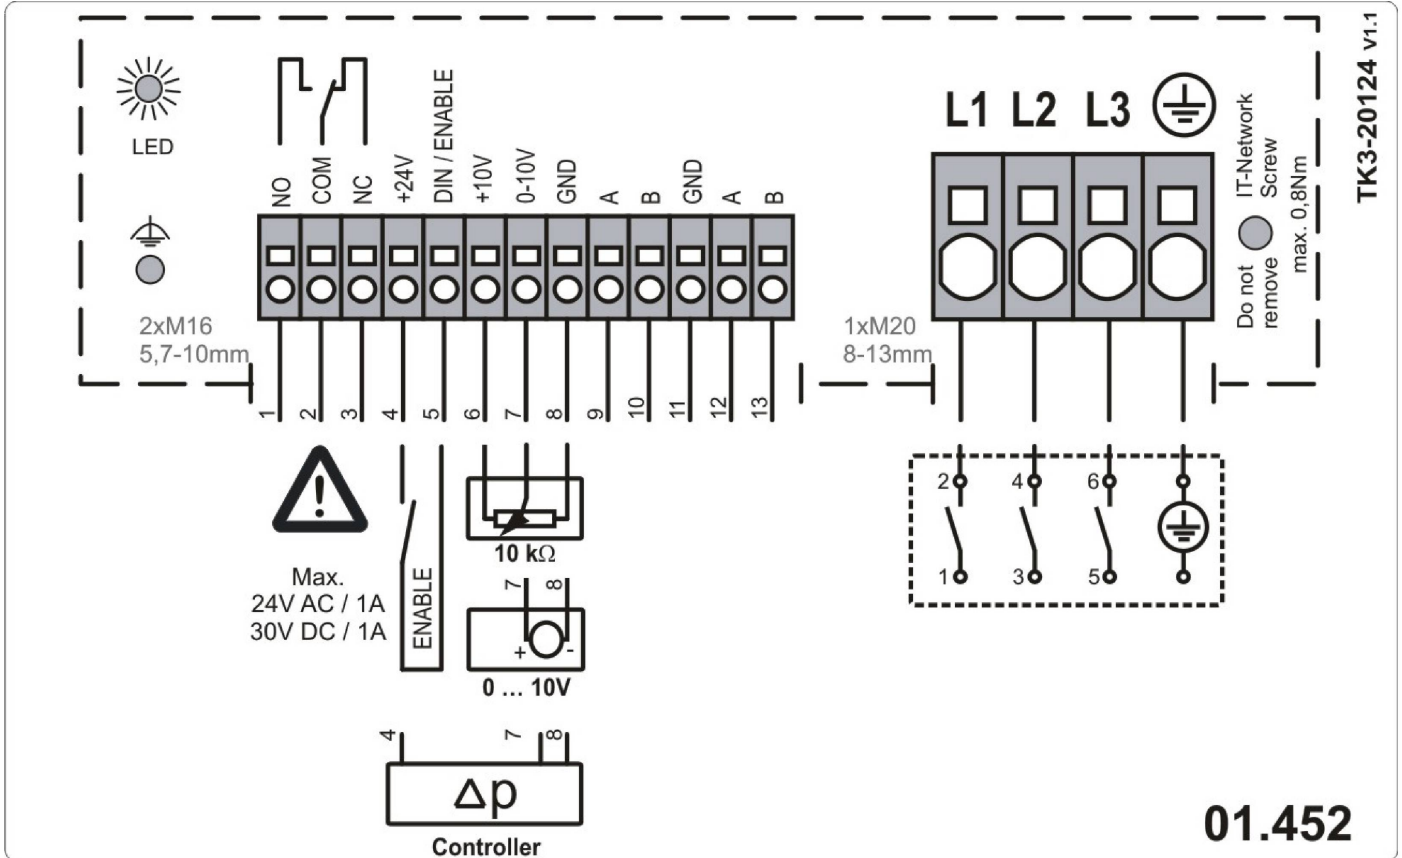





Type: **GKHM 560-CII.183.6NA IE Gen3+**
 Module
 Part no.: N88-56700



stat. Efficiency

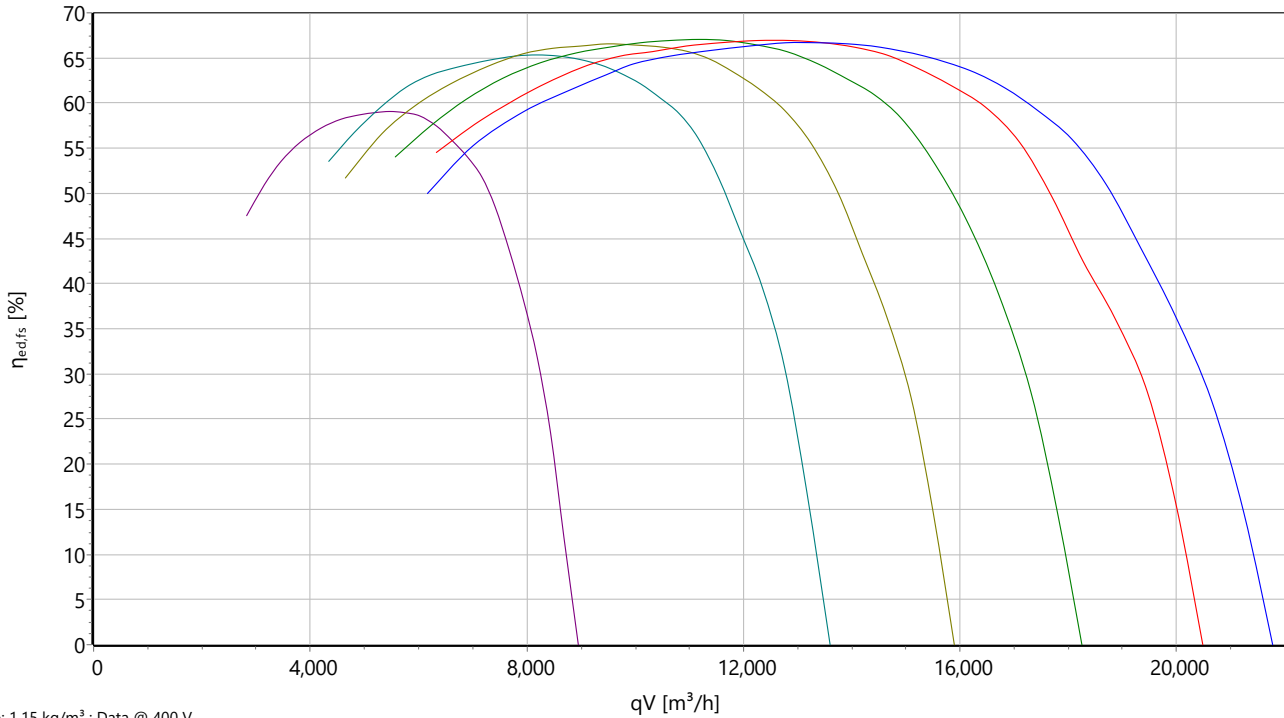

Input power

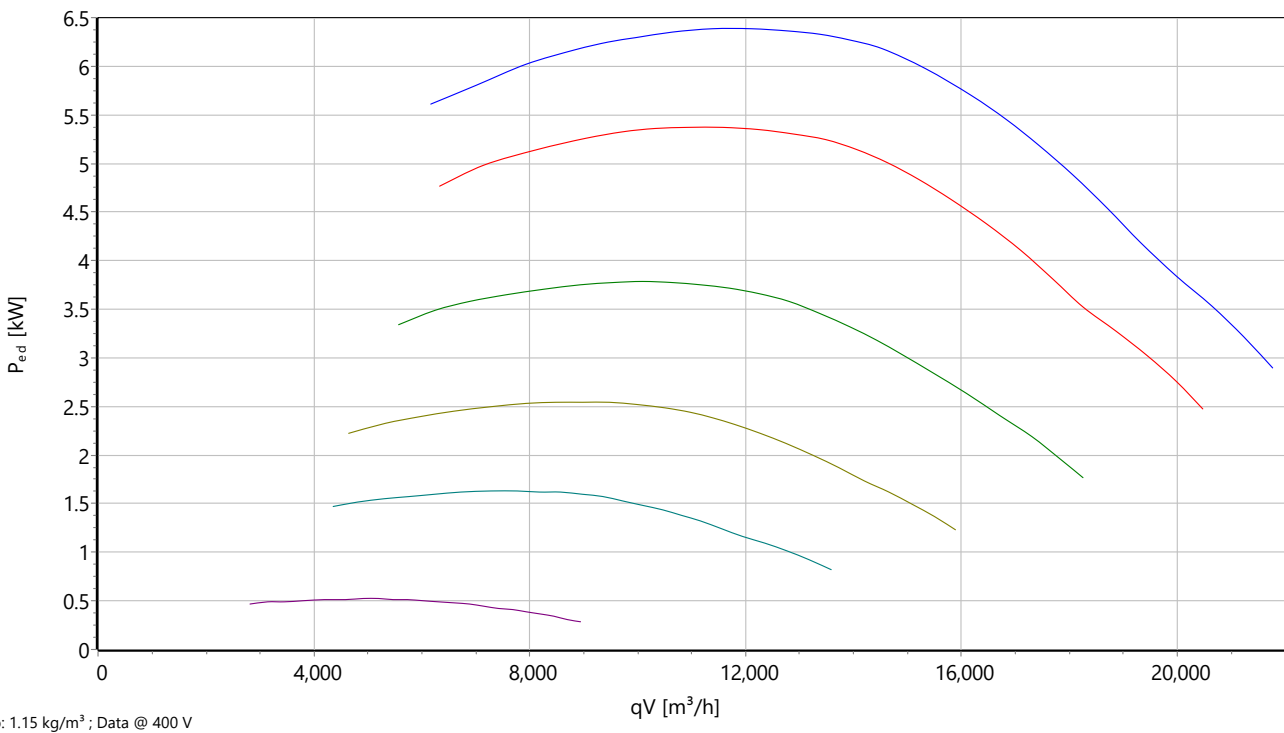



Type: **GKHM 560-CII.183.6NA IE Gen3+**
 Module
 Part no.: N88-56700



Sound power

