

**Ex II 3 G, Ex nA h IIA T4 Gc**  
**T<sub>amb</sub> -30°C to +60°C**  
**US/UL/ExTR15.0133/00**  
**WARNING - DO NOT OPEN WHEN ENERGISED**

**Atex Label**

Connection Diagram	
Speed Control 1350 rpm	Speed Control 900 rpm
DOR : CCW-DE	DOR : CCW-DE
BROWN — PHASE	BROWN — PHASE
BLUE — NEUTRAL	BLUE — NEUTRAL
BLACK — NEUTRAL or N/C	BLACK — PHASE

**Connection Diagram Label**


**Wellington**  
**ECF2-8AXD11**  
 INPUT : 100-240Vac, 50-60Hz, 0.19-0.10A  
 OUTPUT : 13W@1800rpm  
 EP -30° to +50°C, DOR : CCW-DE  
 Dual Speed 1350 / 900rpm

**VDE** IP67 **CE**  
 REG.-Nr. E804  
 -30° to +60°C

**Product Label**

**MOTOR RATING**

PRODUCT CODE	Max Output Watts @ Corresponding rpm	Supply voltage, Frequency	DOR, Mode of Operation
ECF2-8AXD11	13 Watts @ 1800 rpm	100-240Vac, 50-60Hz	CCW Continuous, Dual Speed i) Speed Control 1350 rpm ii) Speed Control 900 rpm

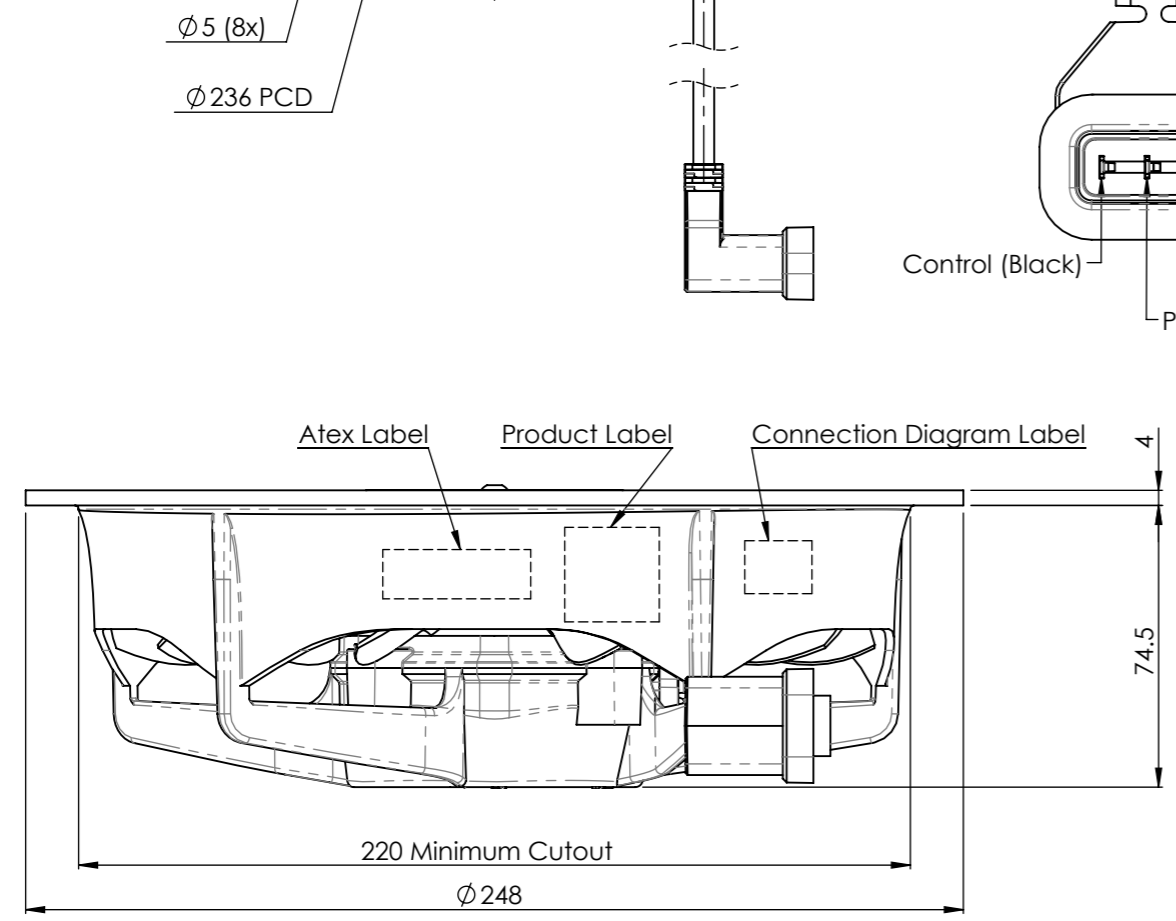

NOTES:  
 1. Refer operation instructions for installation details.

n/a	1	n/a	Initial release	07/03/2018	BPi	ASO
ZONE	ISSUE	ECN	BRIEF NOTE	DATE	DRAWN	CHKD

**DO NOT SCALE OFF DRAWING**

**Wellington**  
 www.wdfl.com

The information contained in this drawing is confidential. Reproduction of this document in any form is subject to explicit written permission.  
 © COPYRIGHT 2004 - 2009 Wellington Drive Technologies Ltd

Description: **Fan Pack Assembly**

Product Code: Refer to table above

Orthographic Projection

Scale: NTS Dimension Units: mm Sheet size: A3

Production Released

GENERAL TOLERANCE LINEAR: ±1mm ANGULAR: ±3°

DWG No.: ECF2-8AXD11 Sheet: 1 of 1