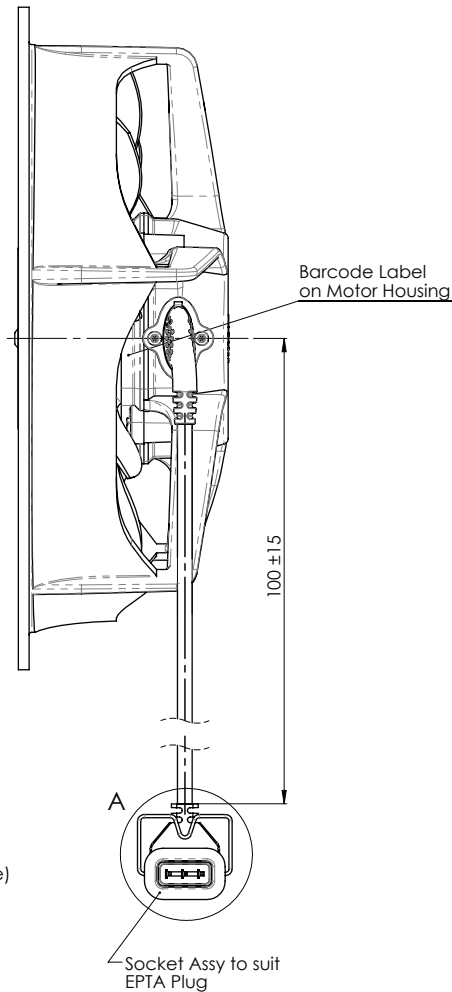

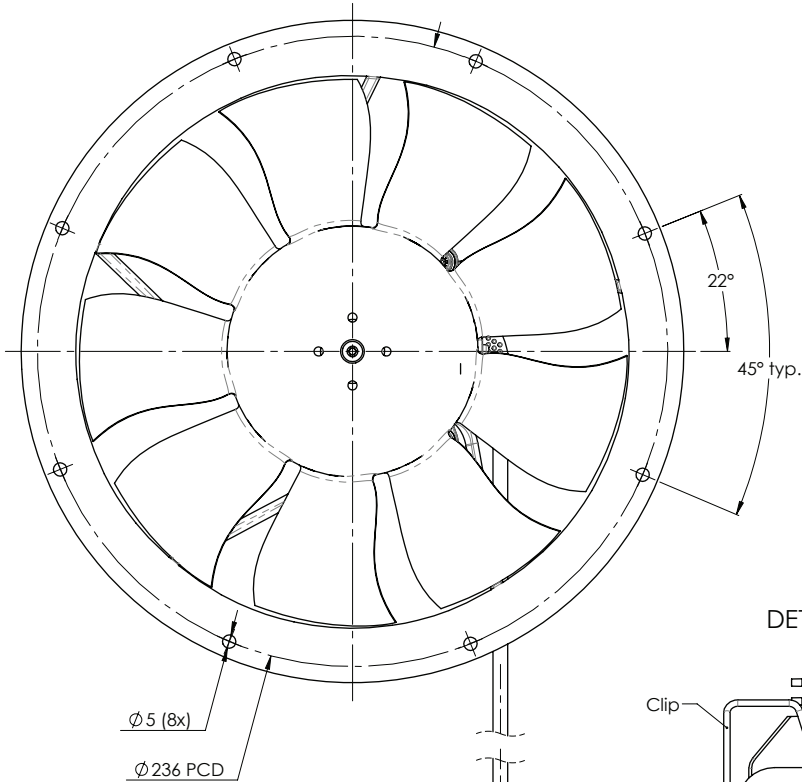


Ex II 3 G, Ex nA h IIA T4 Gc
T_{amb} -30°C to +60°C
US/UL/ExTR15.0133/00
WARNING - DO NOT OPEN WHEN ENERGISED

Atex Label

Connection Diagram

DOR : CCW-DE
 BROWN - PHASE
 BLUE - NEUTRAL
 BLACK - PHASE or NEUTRAL or N/C


Connection Diagram Label

Wellington
ECF2-8AXJ11
 INPUT: 100-240Vac, 50-60Hz, 0.19-0.10A
 OUTPUT : 13W@1800rpm
 EP -30° to +50°C, DOR : CCW-DE
 Speed Control 1000 rpm
 VDE IP67 CE
 -30° to +60°C

Product Label

MOTOR RATING

PRODUCT CODE	Max Output Watts @ Corresponding rpm	Supply voltage, Frequency	DOR, Mode of Operation
ECF2-8AXJ11	13 Watts @ 1800 rpm	100-240Vac, 50-60Hz	CCW Continuous, Speed Control 1000 rpm

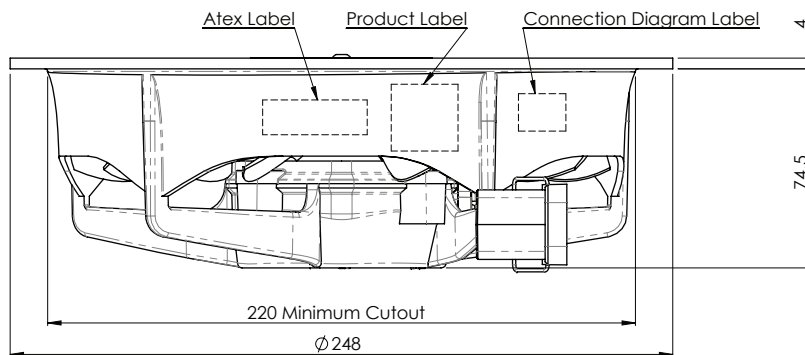

NOTES:

1. Refer operation instructions for installation details.

n/a	1	n/a	Initial release	07/10/2019	BPI	ASo
ZONE	ISSUE	ECN	BRIEF NOTE	DATE	DRAWN	CHKD



DO NOT SCALE OFF DRAWING		Description:	
Fan Pack Assembly		Product Code: Refer to table above	
Orthographic Projection	LIFECYCLE STATE	Scale: Dimension Units	Sheet size:
Third Angle	Production Released	NTS mm	A3
	GENERAL TOLERANCE	DWG No.:	Sheet
	LINEAR ±1mm	ANGULAR ±3°	1 of 1
		ECF2-8AXJ11	