
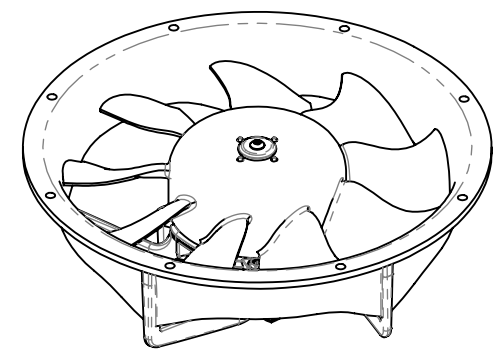
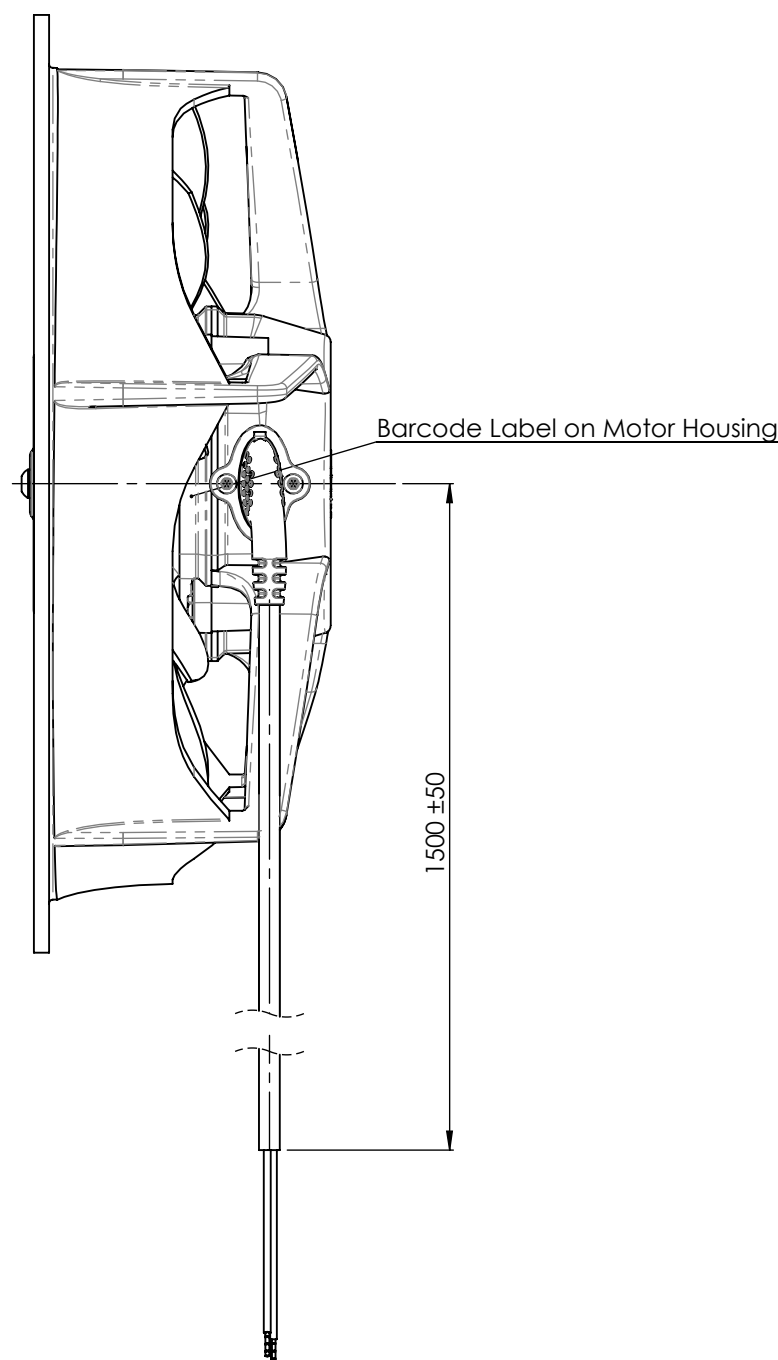


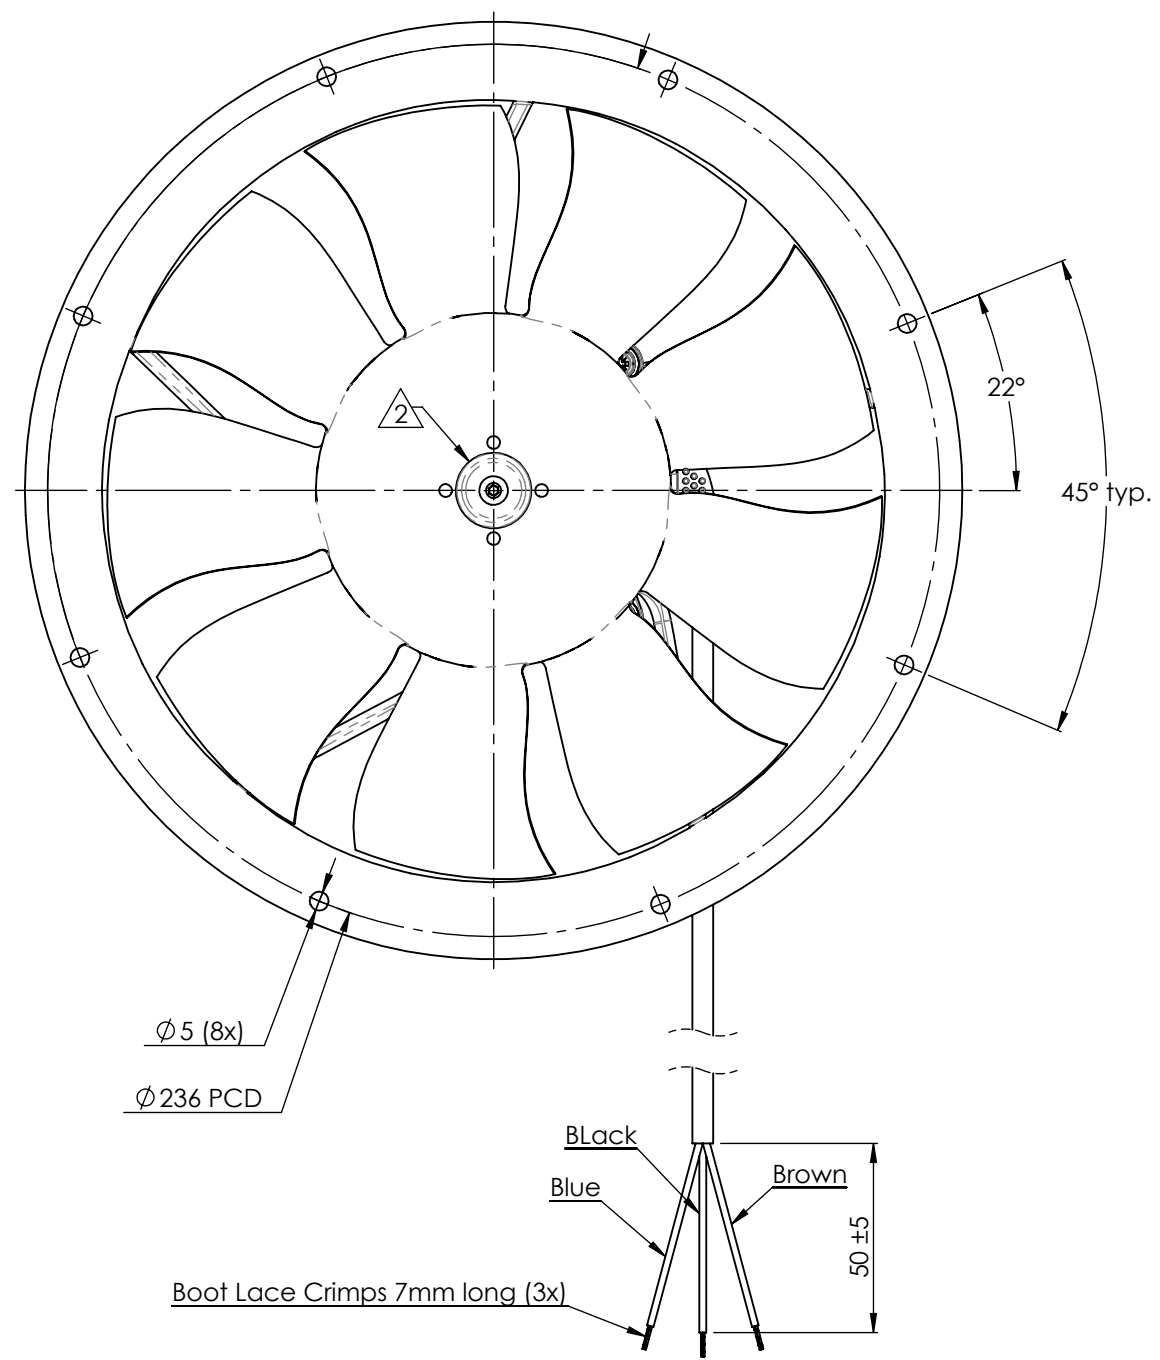

Ex II 3 G, Ex ec h IIA T4 Gc
T_{amb} -30°C to +60°C
US/UL/ExTR15.0133/01
WARNING - DO NOT OPEN WHEN ENERGISED

Atex Label

Connection Diagram	
Speed Control 1500 rpm DOR : CCW-DE BROWN-PHASE BLUE -NEUTRAL BLACK -NEUTRAL or N/C	Speed Control 1800 rpm DOR : CCW-DE BROWN-PHASE BLUE -NEUTRAL BLACK -PHASE

Connection Diagram Label

Wellington®
ECF2-8AXK51
INPUT:100-240Vac,50-60Hz,0.19-0.10A
OUTPUT : 13W@1800rpm
EP -30° to +50°C,DOR : CCW-DE
Dual Speed 1500 / 1800rpm


IP67
-30° to +60°C

CE

Product Label

MOTOR RATING

PRODUCT CODE	Max Output Watts @ Corresponding rpm	Supply voltage, Frequency	DOR, Mode of Operation
ECF2-8AXK51	13 Watts @ 1800 rpm	100-240Vac, 50-60Hz	CCW-DE Continuous, Speed Control 1500/1800 rpm

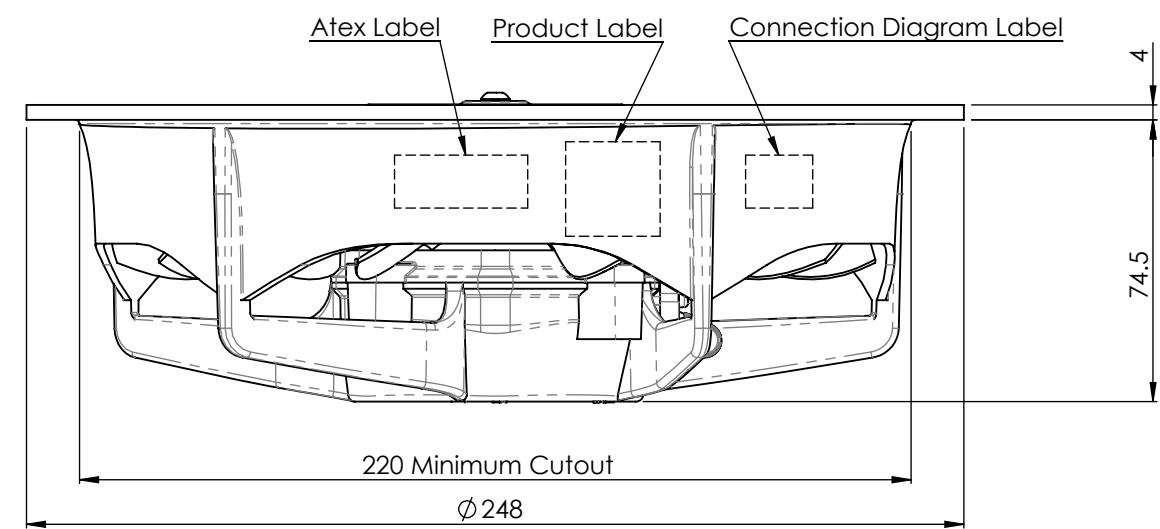

NOTES:
1. Refer operation instructions for installation details.

B-2	2	WCP4079	Added conical washer	21/09/2021	BPi	ASo
n/a	1	n/a	Initial release	18/06/2020	BPi	ASo
ZONE	ISSUE	ECN	BRIEF NOTE	DATE	DRAWN	CHKD

DO NOT SCALE OFF DRAWING

Wellington®
www.wdfl.com

The information contained in this drawing is confidential. Reproduction of this document in any form is subject to explicit written permission.
© COPYRIGHT 2004 - 2009 Wellington Drive Technologies Ltd

Description: **Fan Pack Assembly**

Product Code: Refer to table above

Orthographic Projection

Third Angle

LIFECYCLE STATE
Production Released

Scale: NTS
Dimension Units: mm

Sheet size: A3

GENERAL TOLERANCE
LINEAR: ±1mm
ANGULAR: ±3°

DWG No.: ECF2-8AXK51

Sheet 1 of 1