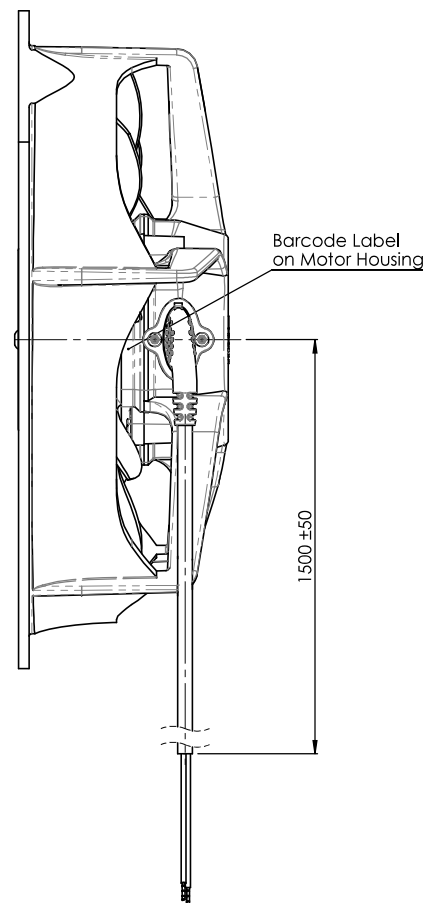
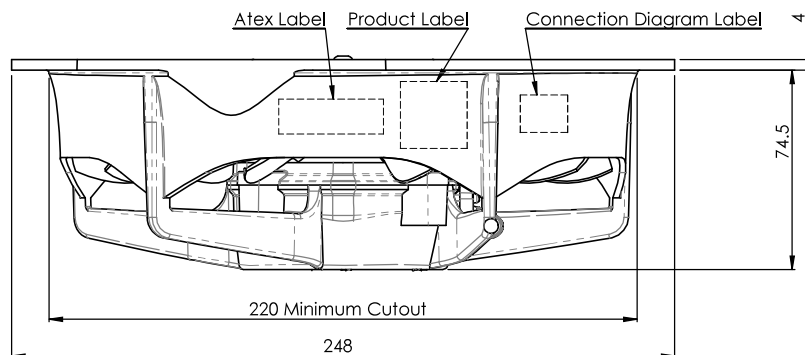
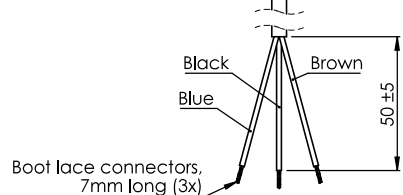
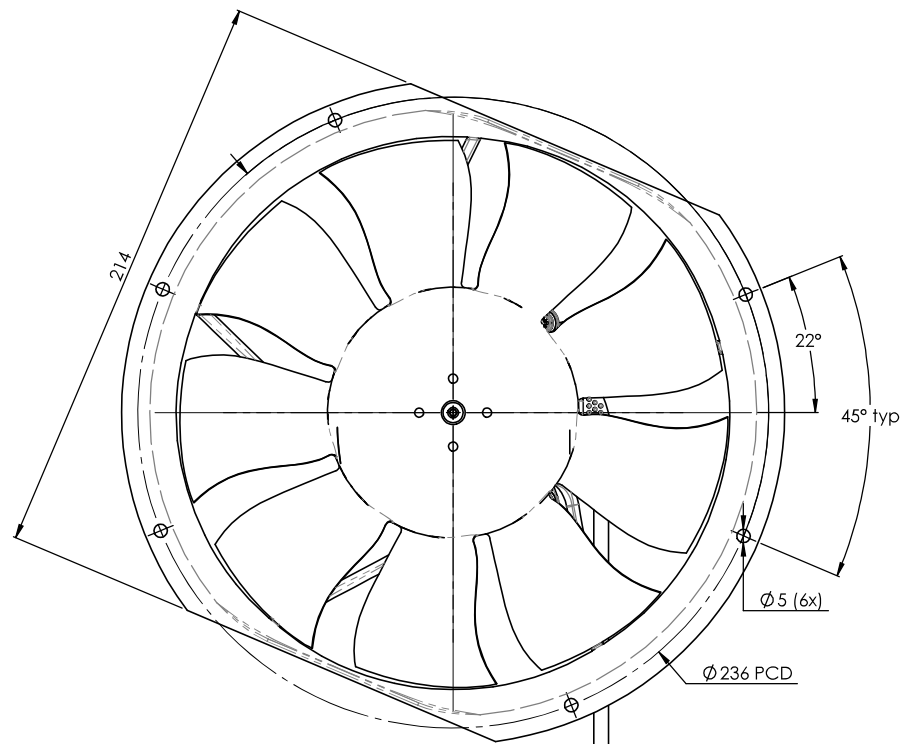


Ex II 3 G, Ex nA h IIA T4 Gc
T_{amb} -30°C to +60°C
US/UL/ExTR15.0133/00
WARNING - DO NOT OPEN WHEN ENERGISED

Atex Label

Connection Diagram

DOR : CCW-DE
 BROWN -PHASE
 BLUE -NEUTRAL
 BLACK -PHASE or NEUTRAL or N/C

Connection Diagram Label

Wellington®
ECF2-8AXN11
 INPUT: 100-240Vac, 50-60Hz, 0.19-0.10A
 OUTPUT : 13W@1800rpm
 EP -30° to +50°C, DOR : CCW-DE
 Speed control 1800rpm
CE
 -30° to +60°C

Product Label

MOTOR RATING

PRODUCT CODE	Max Output Watts @ Corresponding rpm	Supply voltage, Frequency	DOR, Mode of Operation
ECF2-8AXN11	13 Watts @ 1800 rpm	100-240Vac, 50-60Hz	CCW-DE Continuous, Speed Control 1800 rpm

NOTES:

1. Refer operation instructions for installation details.

n/a	1	NA	Initial Issue	04/06/2021	BPI	ASo
ZONE	ISSUE	ECN	BRIEF NOTE	DATE	DRAWN	CHKD

DO NOT SCALE OFF DRAWING
Wellington®
 www.wdft.com
 The information contained in this drawing is confidential. Reproduction of this document in any form is subject to explicit written permission.
 © COPYRIGHT 2004 - 2009 Wellington Drive Technologies Ltd

Description: Fan Pack Assembly			
Product Code: Refer to table above	LIFECYCLE STATE: Production Released	Scale: NTS	Dimension Unit: mm
Orthographic Projection: Third Angle	General Tolerance: LINEAR ±1mm, ANGULAR ±3°	DWG No.: ECF2-8AXN11	Sheet size: A3
			Sheet 1 of 1