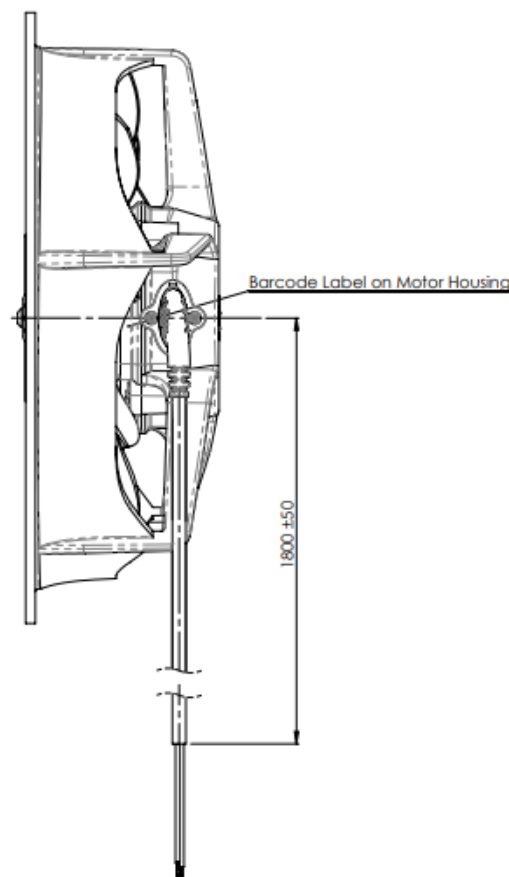
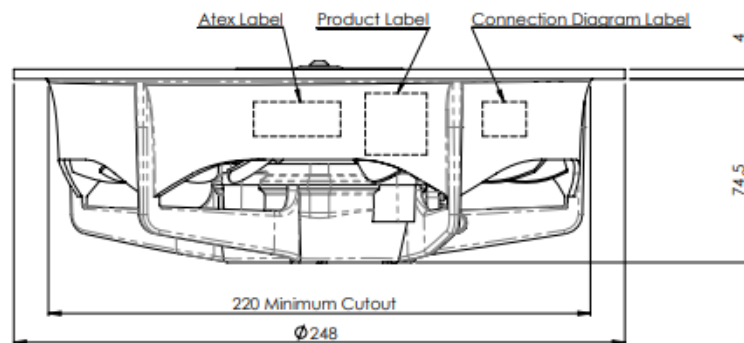
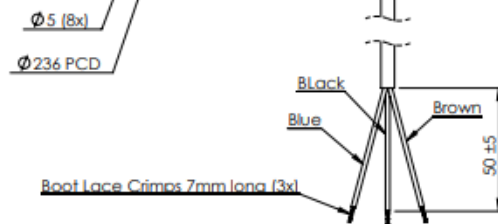
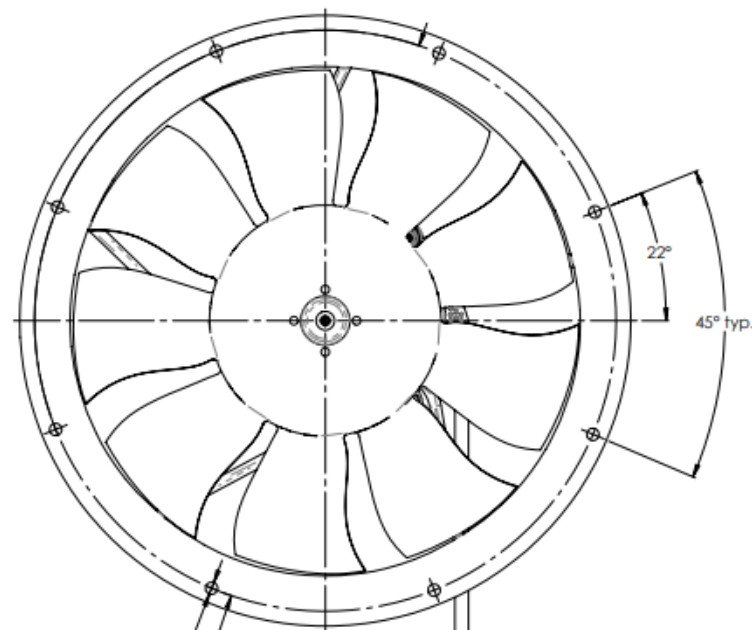


Ex II 3 G, Ex ec h IIA T4 Gc
 T_{amb} -30°C to +60°C
 US/UL/ExTR15.0133/01
 WARNING - DO NOT OPEN WHEN ENERGISED

Atex Label

Connection Diagram

DOR : CCW-DE
 BROWN - PHASE
 BLUE - NEUTRAL
 BLACK - PHASE or NEUTRAL or N/C

Connection Diagram Label

Wellington
ECF2-8AXP21
 INPUT: 100-240Vac, 50-60Hz, 0.19-0.10A
 OUTPUT: 13W@1800rpm
 EP -30° to +50°C, DOR : CCW-DE
 Speed control 1800rpm
 IP67
 -30° to +60°C

Product Label

MOTOR RATING

PRODUCT CODE	Max Output Watts @ Corresponding rpm	Supply voltage, Frequency	DOR, Mode of Operation
ECF2-8AXP21	13 Watts @ 1800 rpm	100-240Vac, 50-60Hz	CCW-DE Continuous, Speed Control 1800 rpm

NOTES:

1. Refer operation instructions for installation details.

n/a	1	n/a	Initial release	03/11/2021	BPI	A50
ZONE	ISSUE	ECN	BRIEF NOTE	DATE	DRAWN	CHKD

Nigel Dade
Nigel Dade
8th November 2021

DO NOT SCALE OFF DRAWING
Wellington
 www.wellington.com
 The information contained in this drawing is confidential. Reproduction of this document in any form is subject to explicit written permission.
 © COPYRIGHT 2024 - 2025 Wellington Drive Technologies Ltd

Description: Fan Pack Assembly			
Product Code: Refer to table above	Scale: NTS	mm	Sheet Size: A3
Production Released	NTS	mm	Sheet 1 of 1
General Tolerance: ±1mm	Angular: ±3°	DWG No.: ECF2-8AXP21	