


C25SE SERIES

Description: **Axial fan a.c. 280X280X80mm**

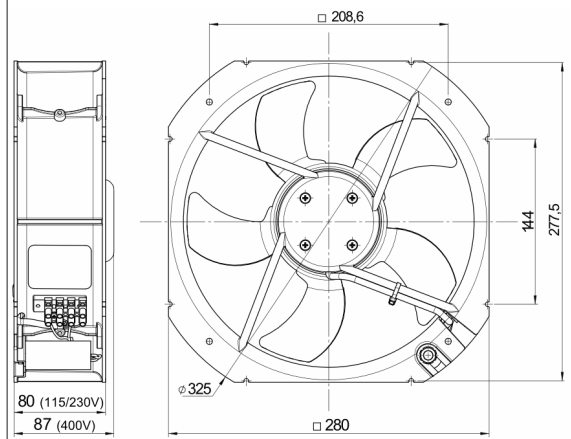

Fan material:

casing of aluminium alloy die casting and black painted steel

Casing material:

aluminium UNI5076

Fixing system:

No 4 holes Ø5.4

Motor protection:

thermally

Rated temperature range:

from -20°C to +70°C

Motor Lifetime L10 at 25°C (approx.):




da 53,000 a 80,000 h

Electrical connection:

by terminal block 3 pins (L-N-PE)

Weight:

2,800 kg

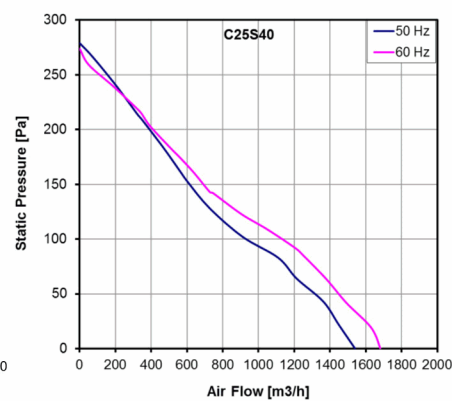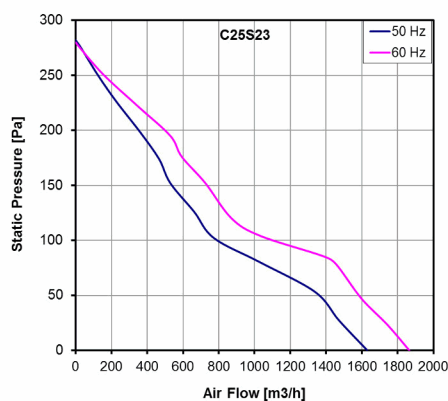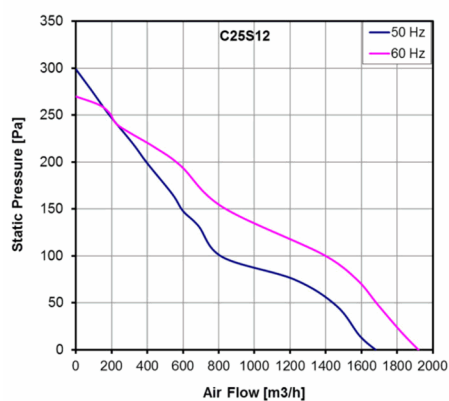

Model	Bearing	Voltage	Frequency	Rated Current	Rated Power	Max Air Flow**	Static Pressure	Noise	RPM	Approvals
		(V)	(Hz)	(A)	(W)	(m3/h)	(Pa)	[db(A)]	(rpm)	
C25S12HKBE00	Ball	115 V a.c.	50/60	1.1/0.6	107/138	1,680/1,920	299/270	64.6/67.4	2,730/3,170	CE
C25S23HKBE00	Ball	230 V a.c.	50/60	0.50/0.28	101/127	1,630/1,865	280/280	67.0/70.0	2,735/3,150	CE
C25S40HKBE00	Ball	400 V 3 ~	50/60	0.19/0.21	86/117	1,540/1,680	280/275	67.0/69.0	2,635/2,840	CE